

No. 95-13

Add Vent Pipe

vent pipe #24

Added 12/28/95 Fee 60

Commonwealth of Massachusetts

, Massachusetts

PG 2K# 1484 5/5/95

Application for Disposal System Construction Permit

Application is hereby made for a Permit to Construct or Repair an On-site Sewage Disposal System at:

Location Address or Lot No. <u>Lot 6</u> <u>24 Canterbury Lane</u>	Owner's Name, Address and Tel. # <u>253-3486</u> <u>Ronald Laverdiere</u> <u>RR2 Pelham Hill Rd</u> <u>Amherst, MA</u>
Installer's Name, Address, and Tel. #	Designer's Name, Address and Tel.# <u>323-7124</u> <u>Lewis & Cook Surveyors, Inc</u> <u>Robert F. Sheehan, P.E.</u> <u>Belchertown, MA</u>

Type of Building:

Dwelling No. of Bedrooms 4 Garbage Grinder
Other Type of Building _____ No. of Persons _____ Showers Cafeteria
Other Fixtures _____

Design Flow 825 gallons per day. Calculated daily flow 865.8 gallons.

Plan Date 4/25/95 Number of sheets 4 Revision Date _____

Title _____

Description of soil stratified sand & gravel

Nature of Repairs or Alterations (Answer when applicable) _____

Date last inspected: _____


Agreement:

The undersigned agrees to ensure the construction and maintenance of the aforescribed on-site sewage disposal system in accordance with the provisions of Title 5 of the Environmental Code and not to place the system in operation until a Certificate of Compliance has been issued by this Board of Health.

Signed Ronald Laverdiere Date 5/5/95


Application Approved by Ronald Laverdiere Date 5/5/95

Application Disapproved for the following reasons _____

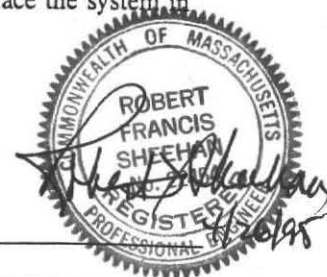

Permit No. 95-13

Date Issued _____

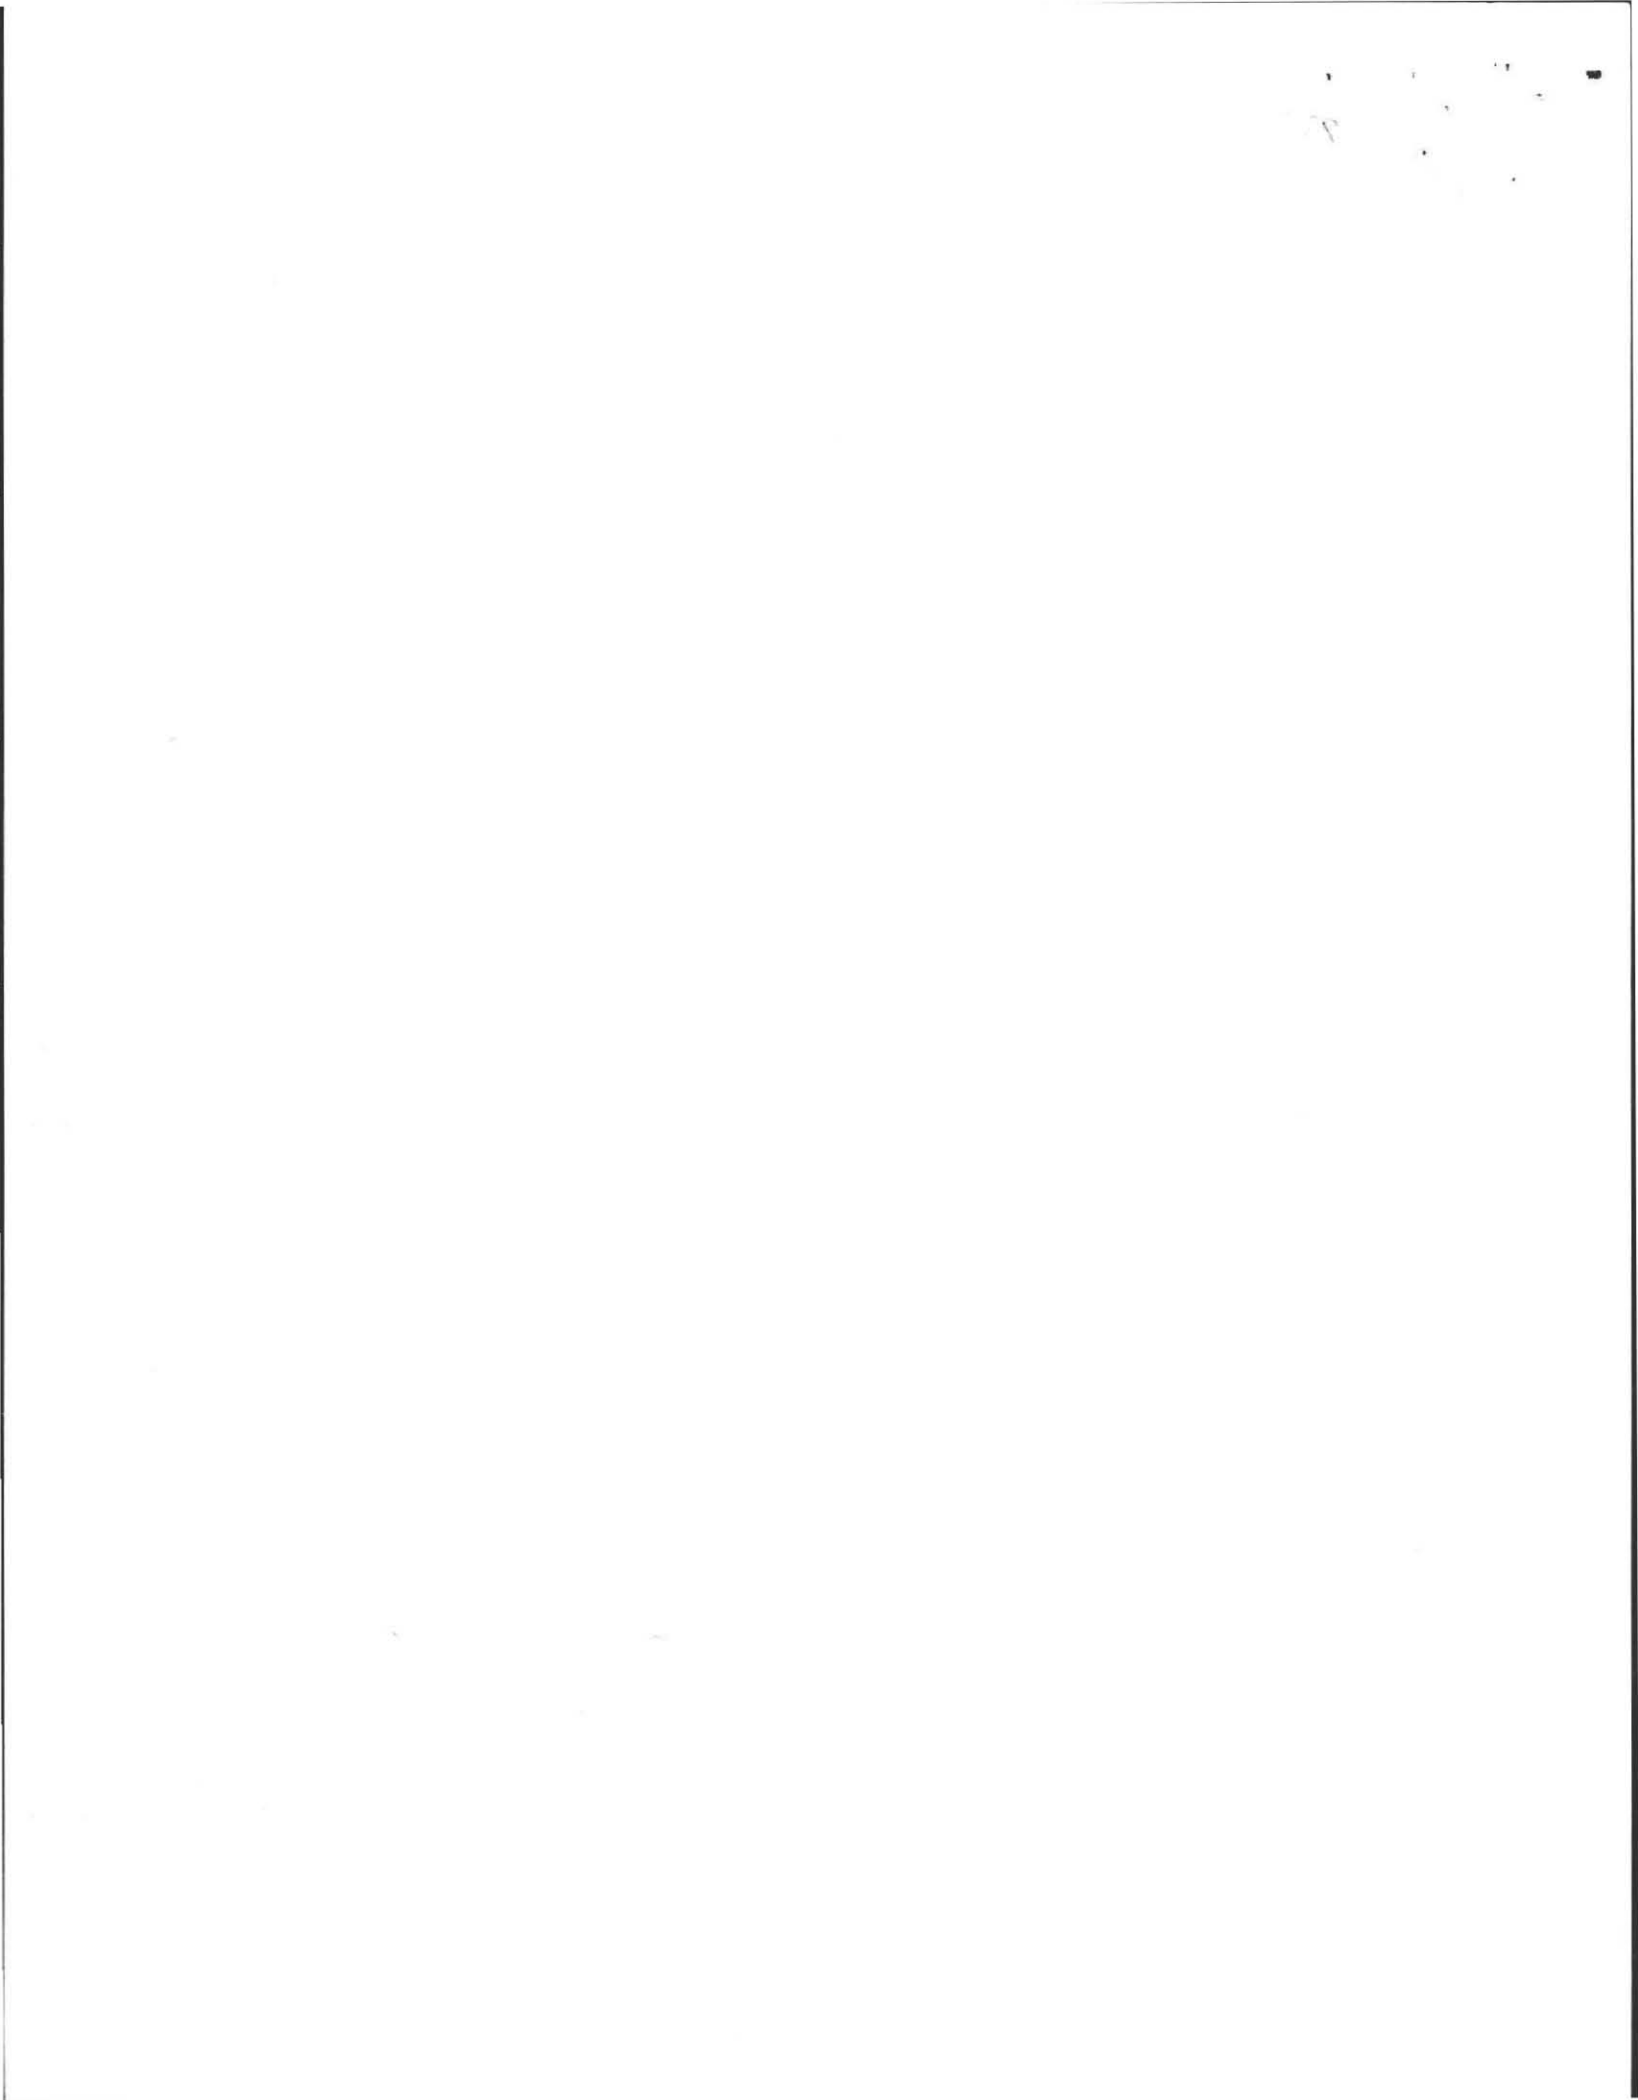

No. 95-13

Fee _____

Commonwealth of Massachusetts
, Massachusetts

Application for Disposal System Construction Permit

Application is hereby made for a Permit to Construct or Repair an On-site Sewage Disposal System at:

Location Address or Lot No. <u>Lot 6 Canterbury Lane</u>	Owner's Name, Address and Tel. # <u>253-3486</u> <u>Ronald Laverdiere RR2 Pelham Hill Rd Amherst, MA</u>
Installer's Name, Address, and Tel. #	Designer's Name, Address and Tel. # <u>323-7124</u> <u>Lewis & Cook Surveyors, Inc Robert F. Sheehan, P.E. Belchertown, MA</u>

Type of Building:

Dwelling No. of Bedrooms 4 Garbage Grinder
Other Type of Building _____ No. of Persons _____ Showers Cafeteria
Other Fixtures _____

Design Flow 825 gallons per day. Calculated daily flow 865.8 gallons.

Plan Date 4/25/95 Number of sheets 4 Revision Date _____

Title _____

Description of soil stratified sand & gravel

Nature of Repairs or Alterations (Answer when applicable) _____

Date last inspected: _____


Agreement:

The undersigned agrees to ensure the construction and maintenance of the aforescribed on-site sewage disposal system in accordance with the provisions of Title 5 of the Environmental Code and not to place the system in operation until a Certificate of Compliance has been issued by this Board of Health.

Signed Ronald Laverdiere Date 5/5/95


Application Approved by Robert F. Sheehan Date 5/5/95

Application Disapproved for the following reasons _____

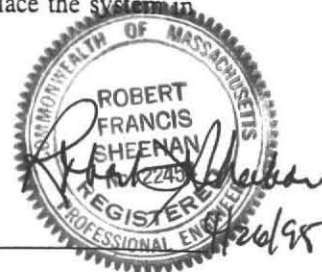

Permit No. 95-13

Date Issued _____

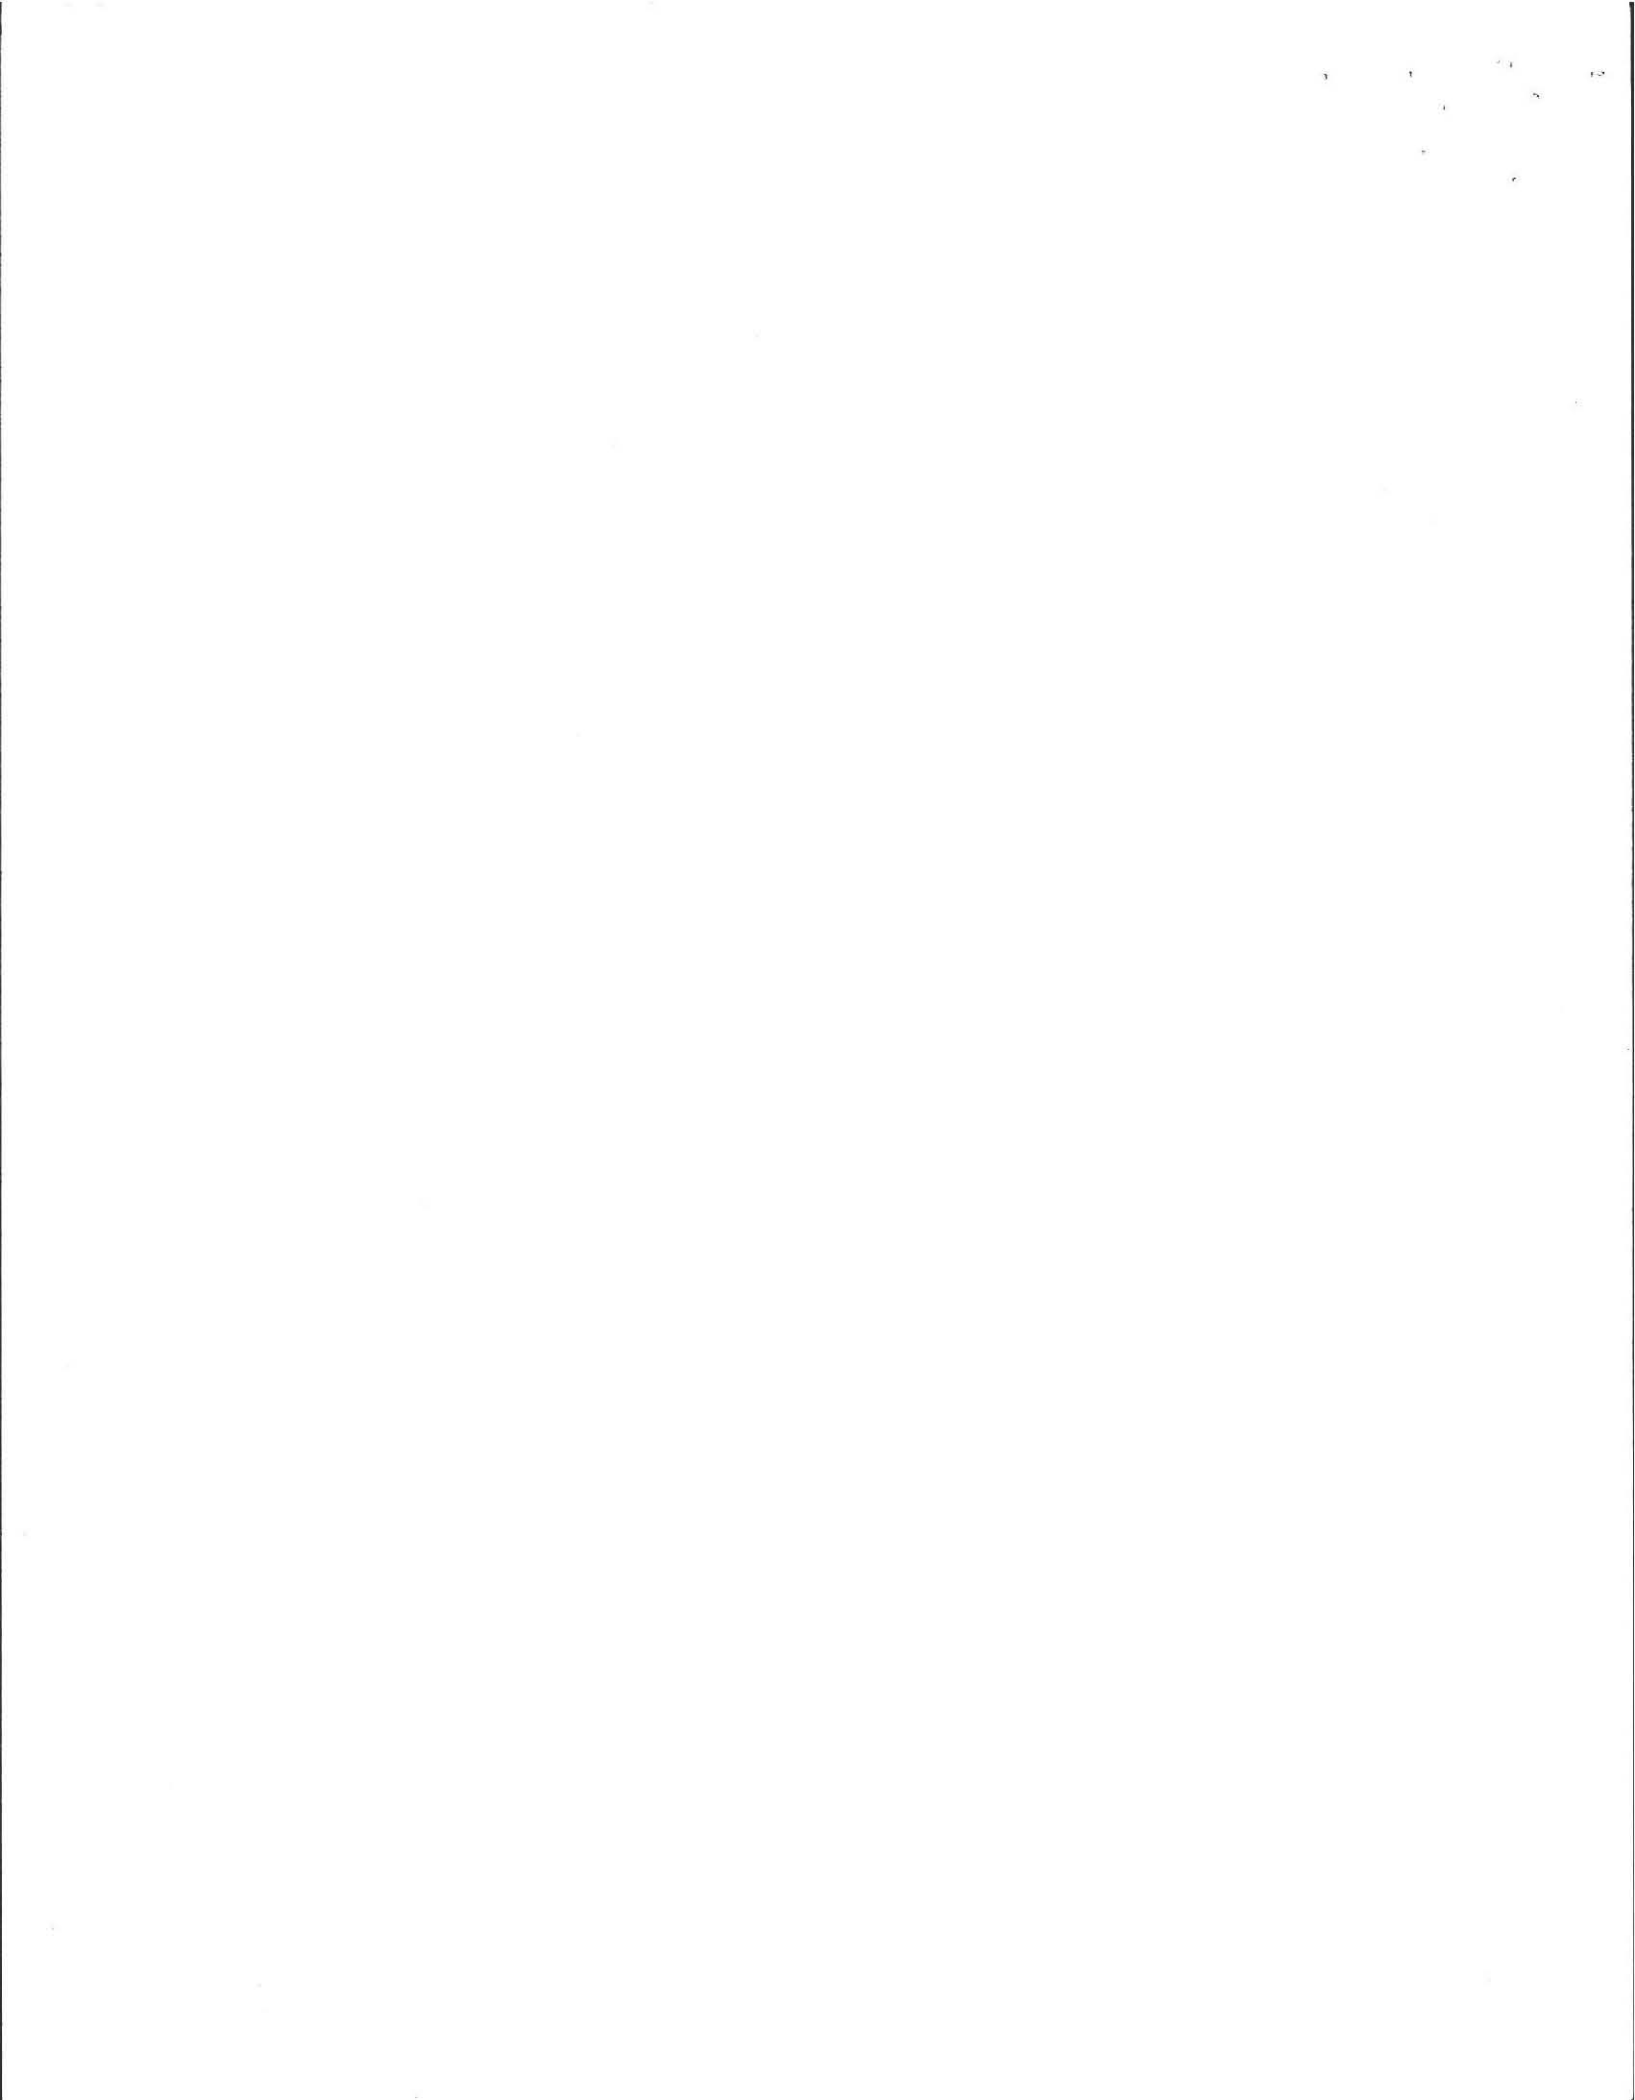

TOWN OF AMHERST

PERC TEST DATA SHEET

~~LOT # 9~~
EATD

DATE 4/18/89 LOCATION Bay Road LOT SIZE Lot # 6

OWNER Ron L. Vendreac ADDRESS 198 Wildflower Dr. TELE # 287-8288

P.E./RS Robert Sover FIRM F. J. Ios ENT OBSERVED BY David Zarrow

BACK HOE OPERATOR Stoney's BENCH MARK _____

PERC DEPTH 46" PRE SOAK TIME 2:10 PERC DEPTH 58" PRE SOAK TIME _____

TEST _____
can't hold _____
_____ can't hold _____
_____ _____

RATE (2) RATE (2)

#1

TOP	8
SUB	24
SAND + Gravel DRY 13'	

#2


TOP	6
SUB	28"
Gravel DRY 12'	


TOP	
SUB	

TOP	
SUB	

TOP	
SUB	

TOP	
SUB	

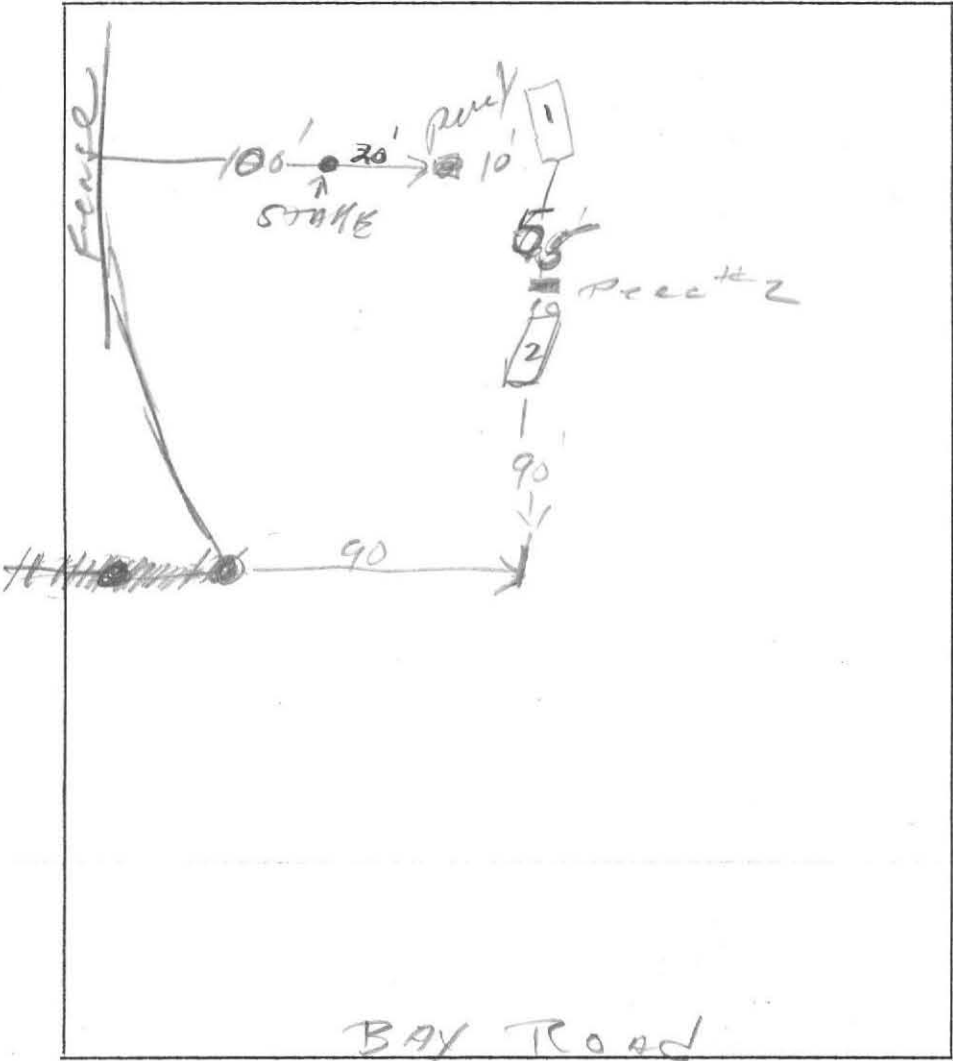


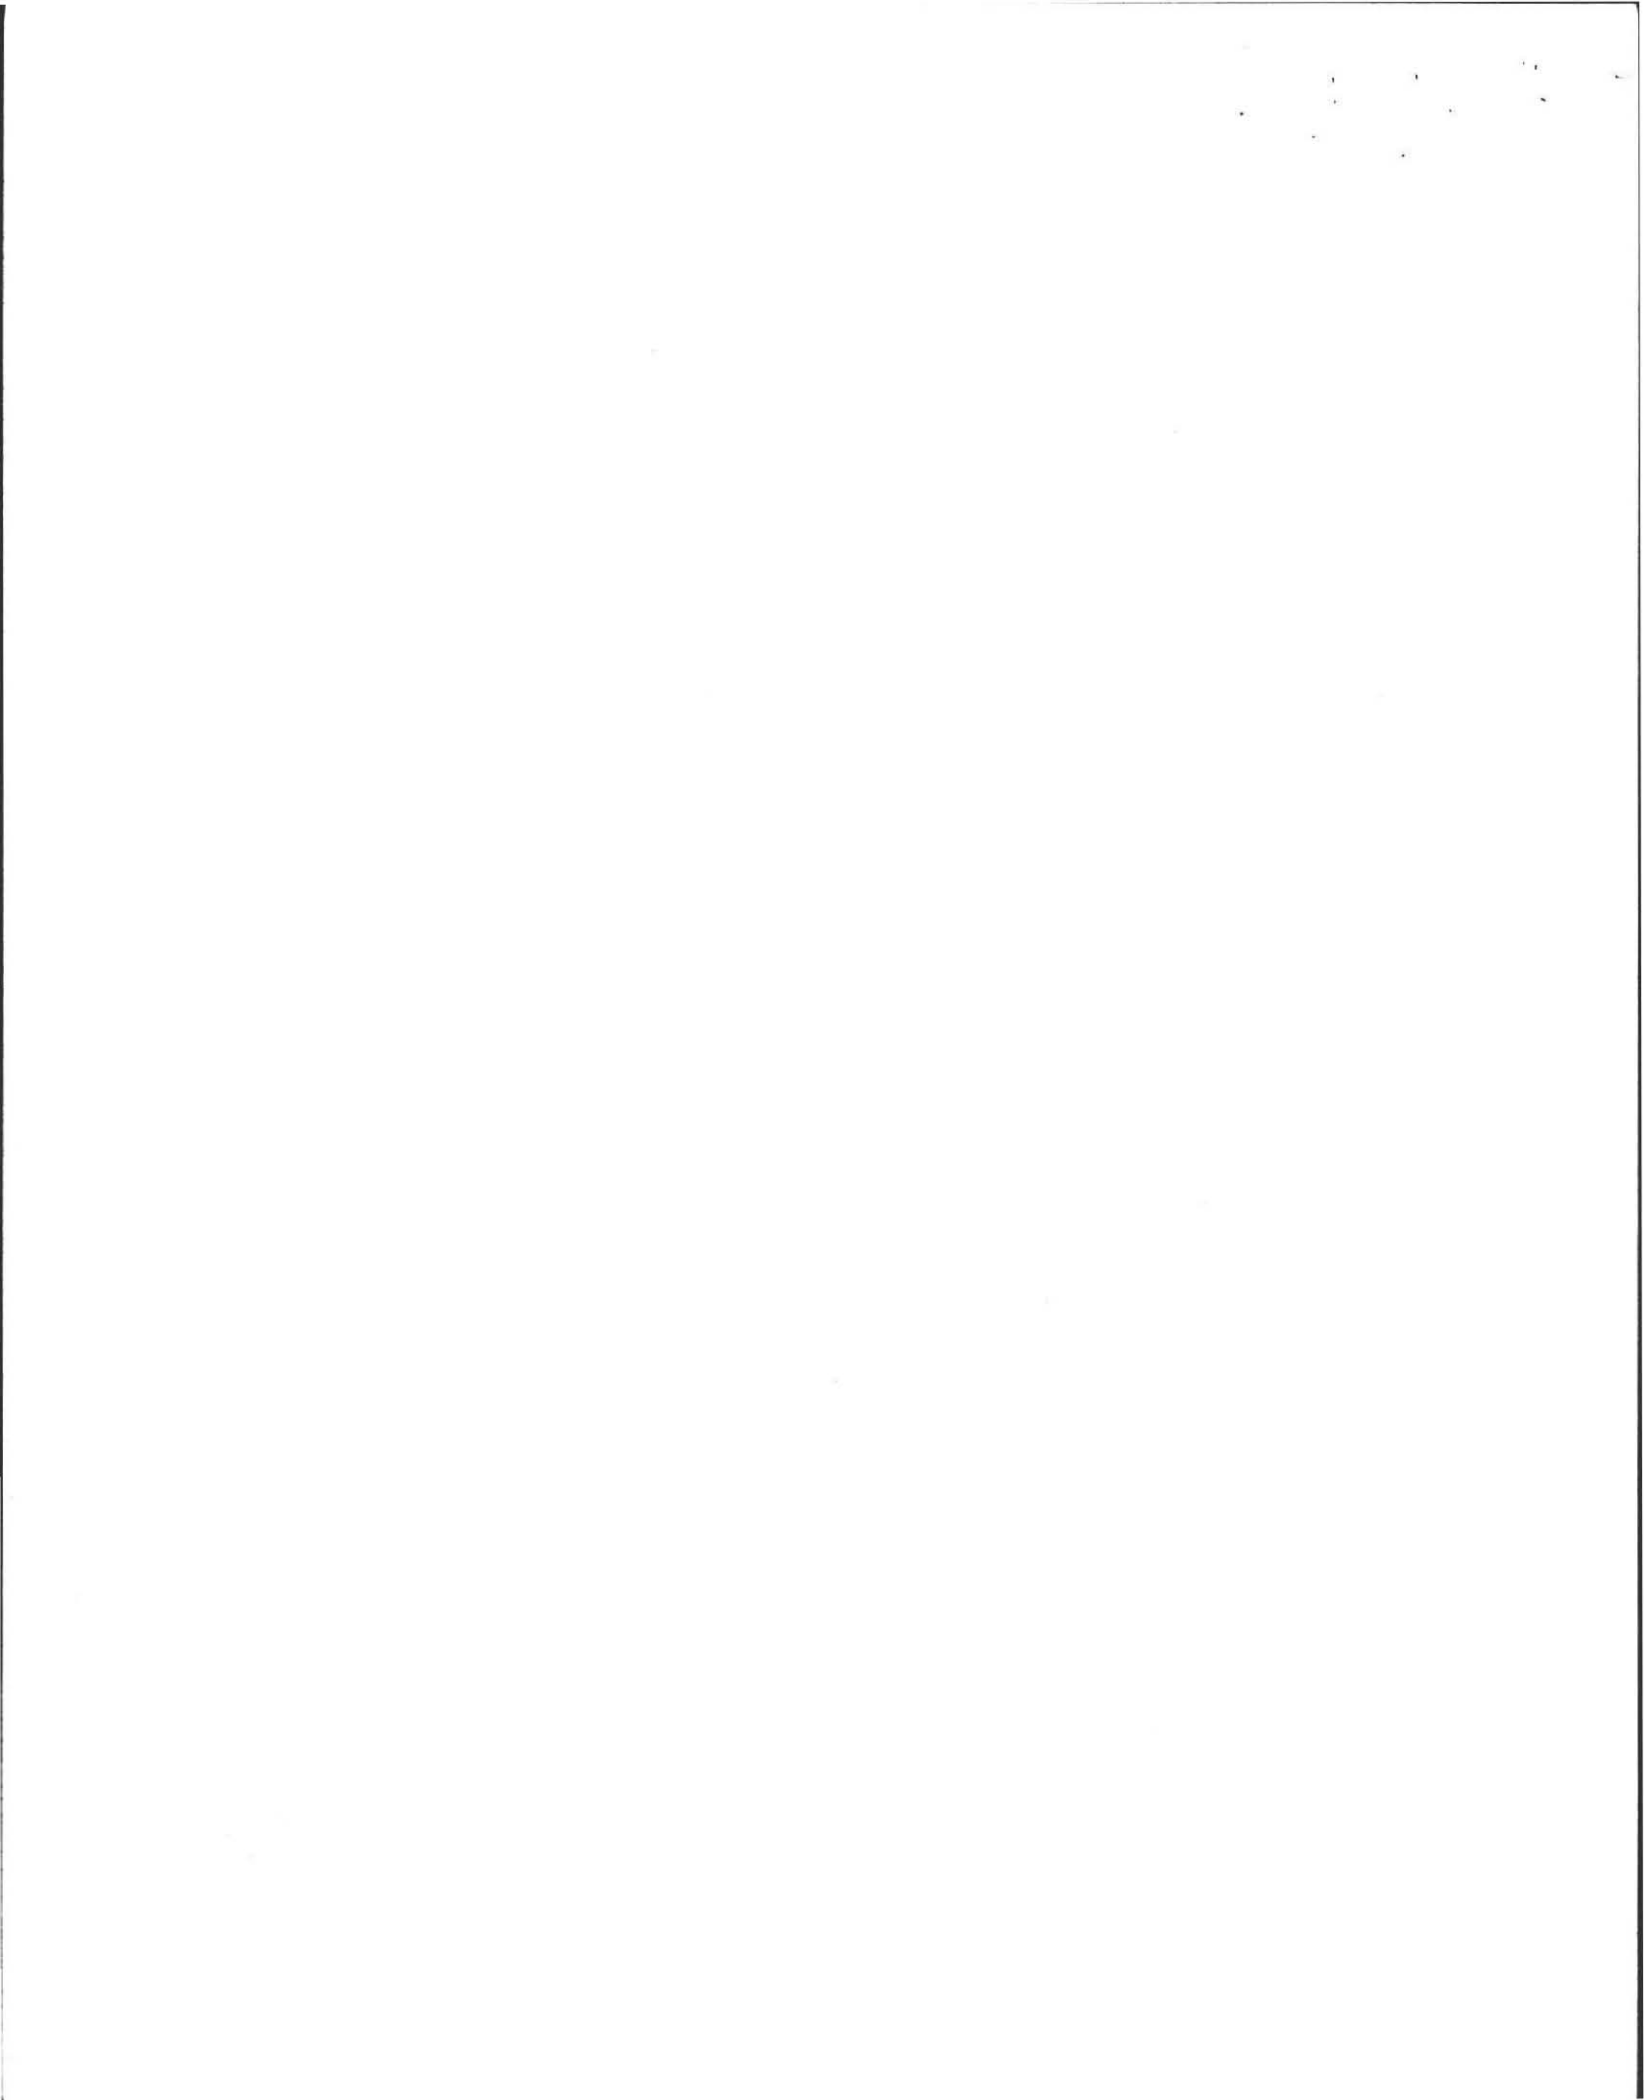


DEEP TEST HOLES

LOT 6 Pg. 3
Canterbury Lane

#1

#2

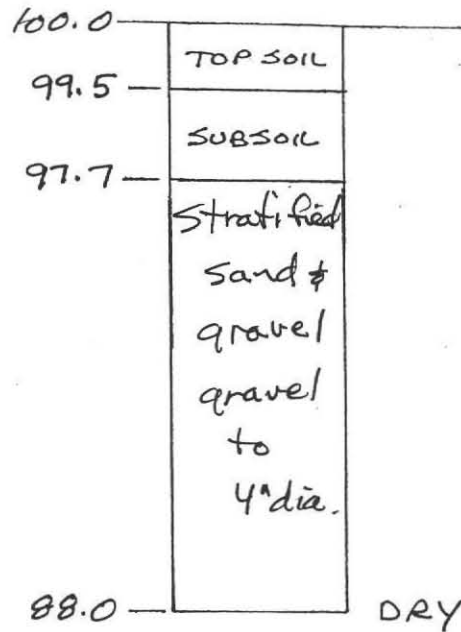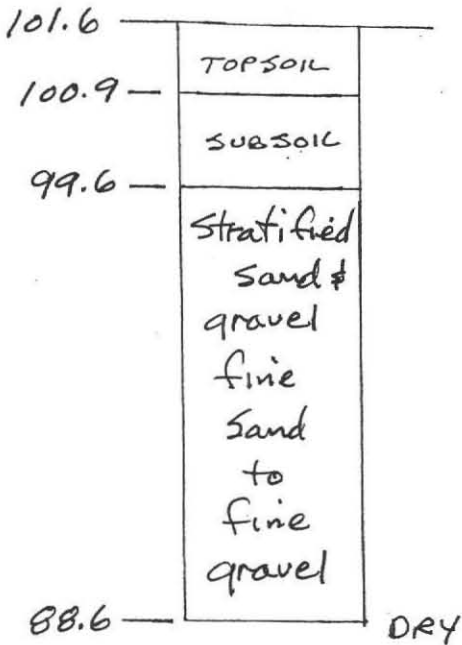

CALCULATIONS

SOIL CLASS I

BOTTOM AREA

$2.0 \text{ min./in} = 0.74 \text{ gal./sq.ft.}$

$60' \times 3' \times 3 \text{ lines} = 540 \text{ sq.ft.} \times 0.74 \text{ gal./sq.ft.} = 399.6 \text{ GAL}$


SIDEWALL AREA (NOT ALLOWED IN LEACHING FIELDS)


$60' \times \frac{21''}{12} \times 2 \text{ sides} \times 3 \text{ lines} = 630 \text{ sq.ft.} \times 0.74 \text{ gal./sq.ft.} = 466.2 \text{ GAL.}$


865.8 GAL.

AVAILABLE

825 REQUIRED ✓

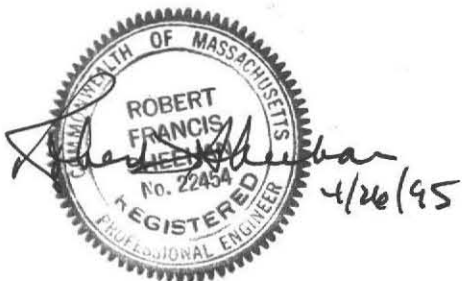

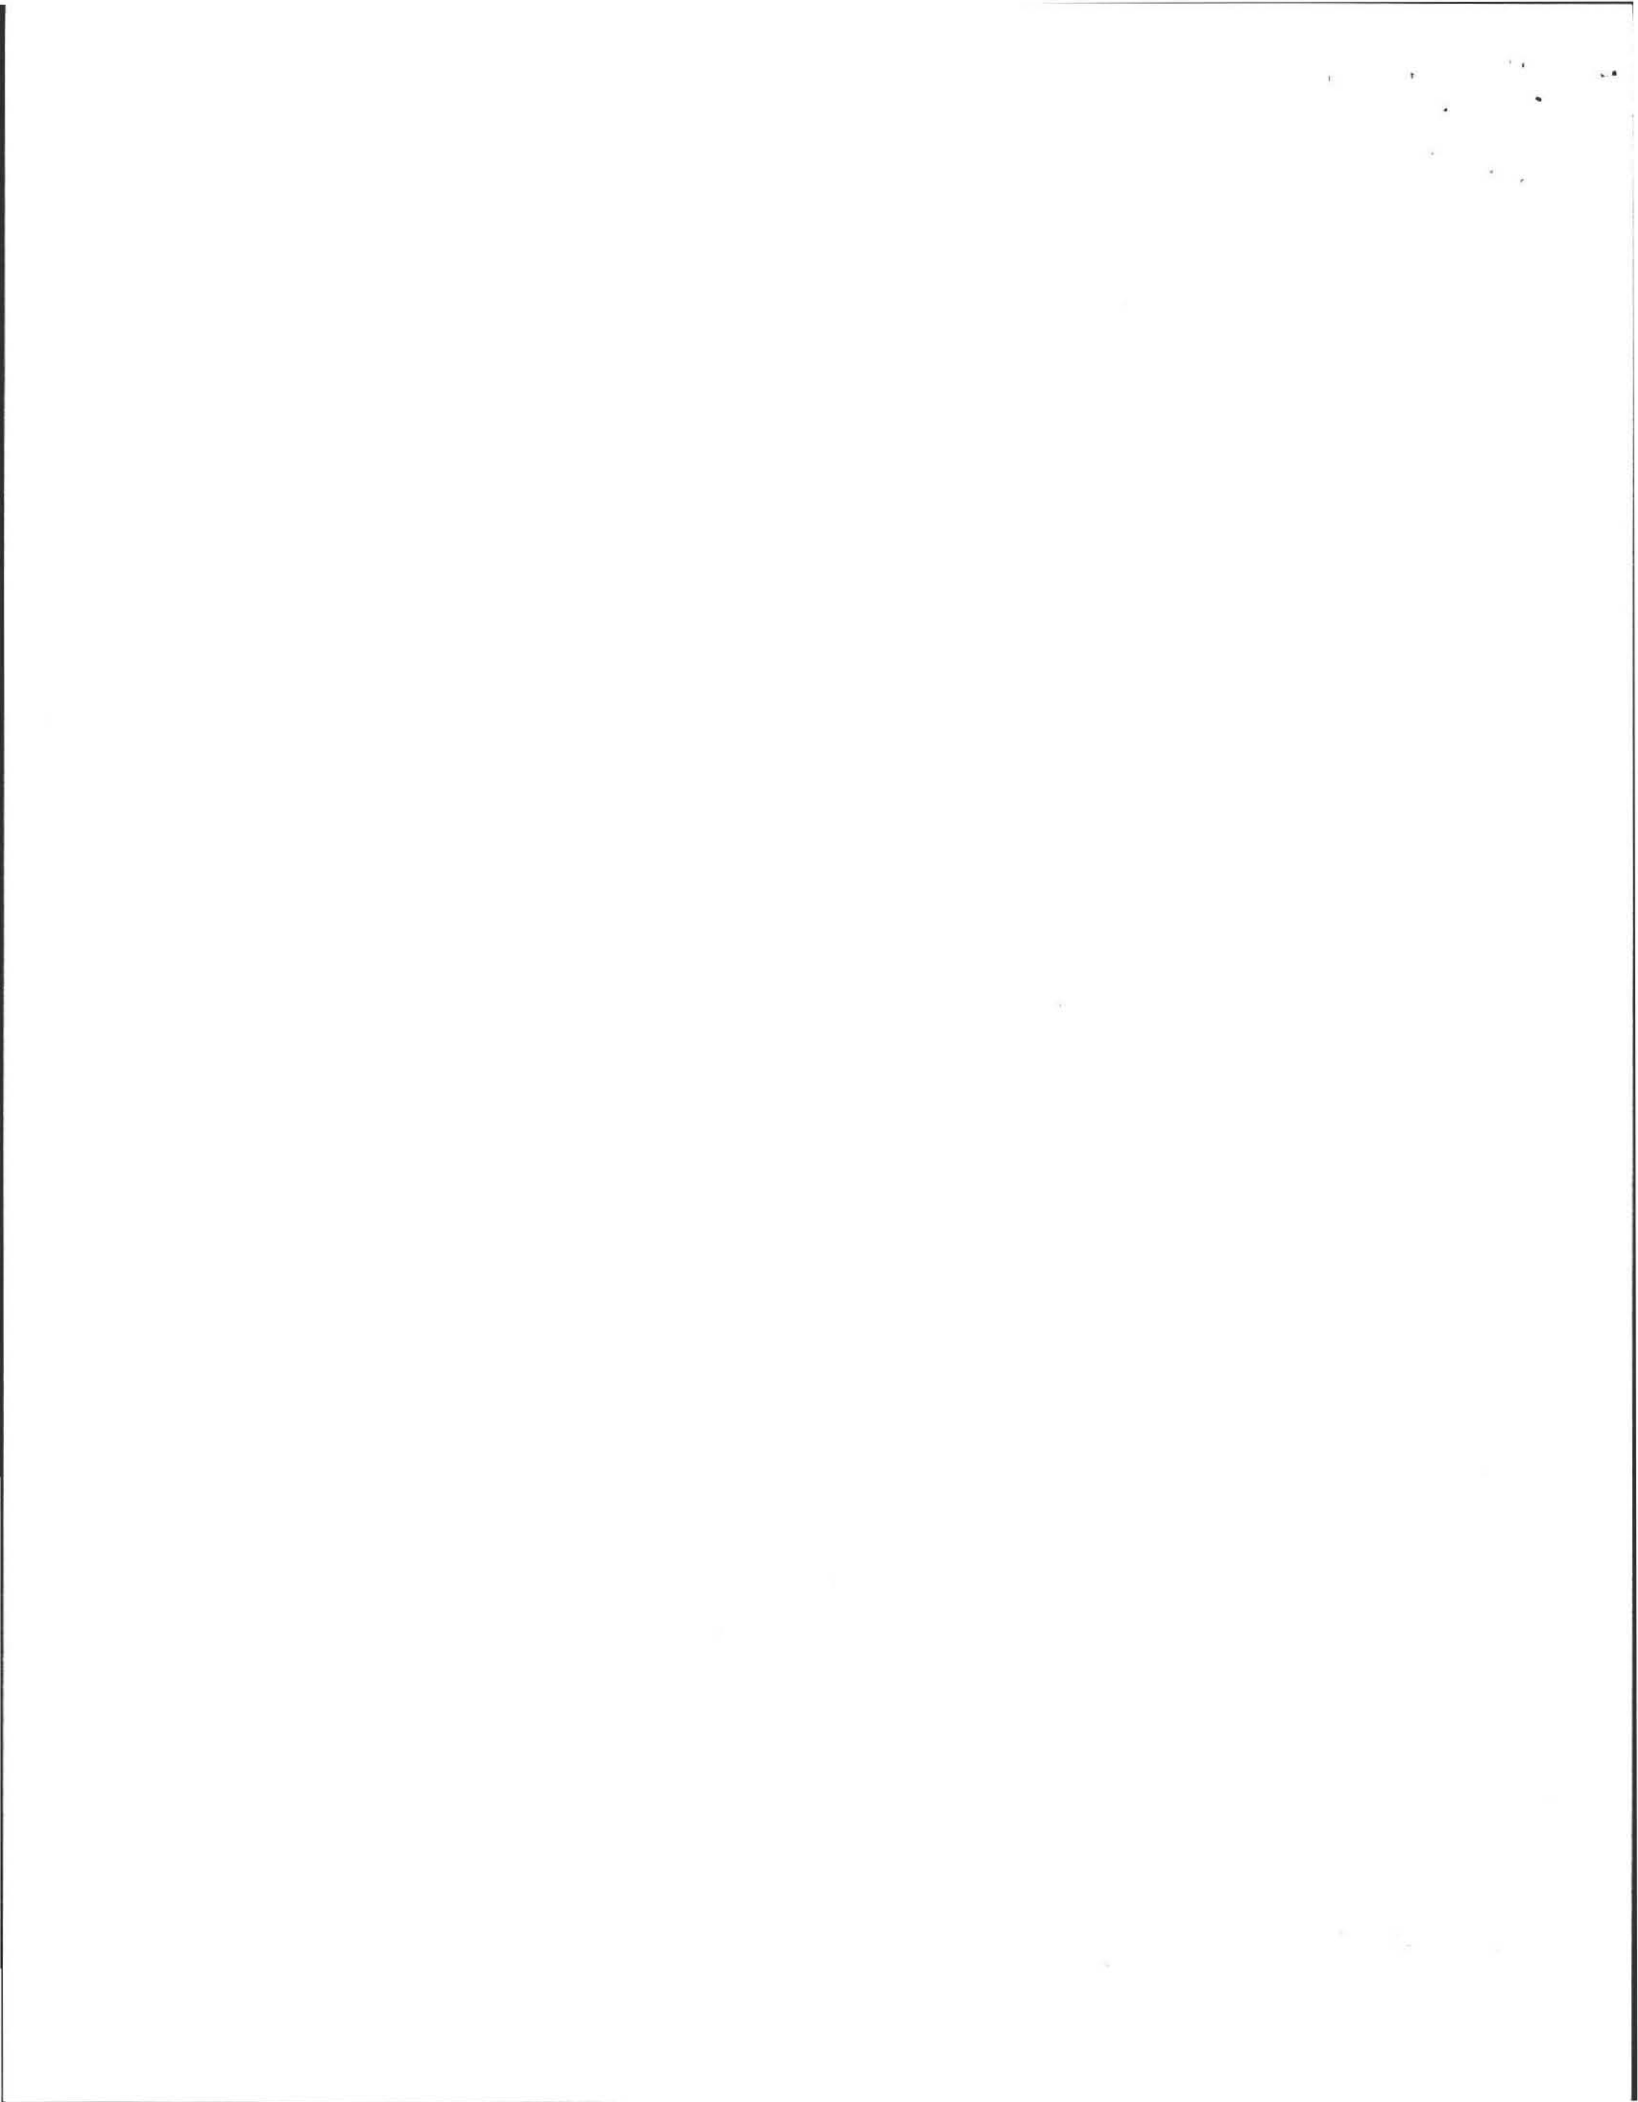

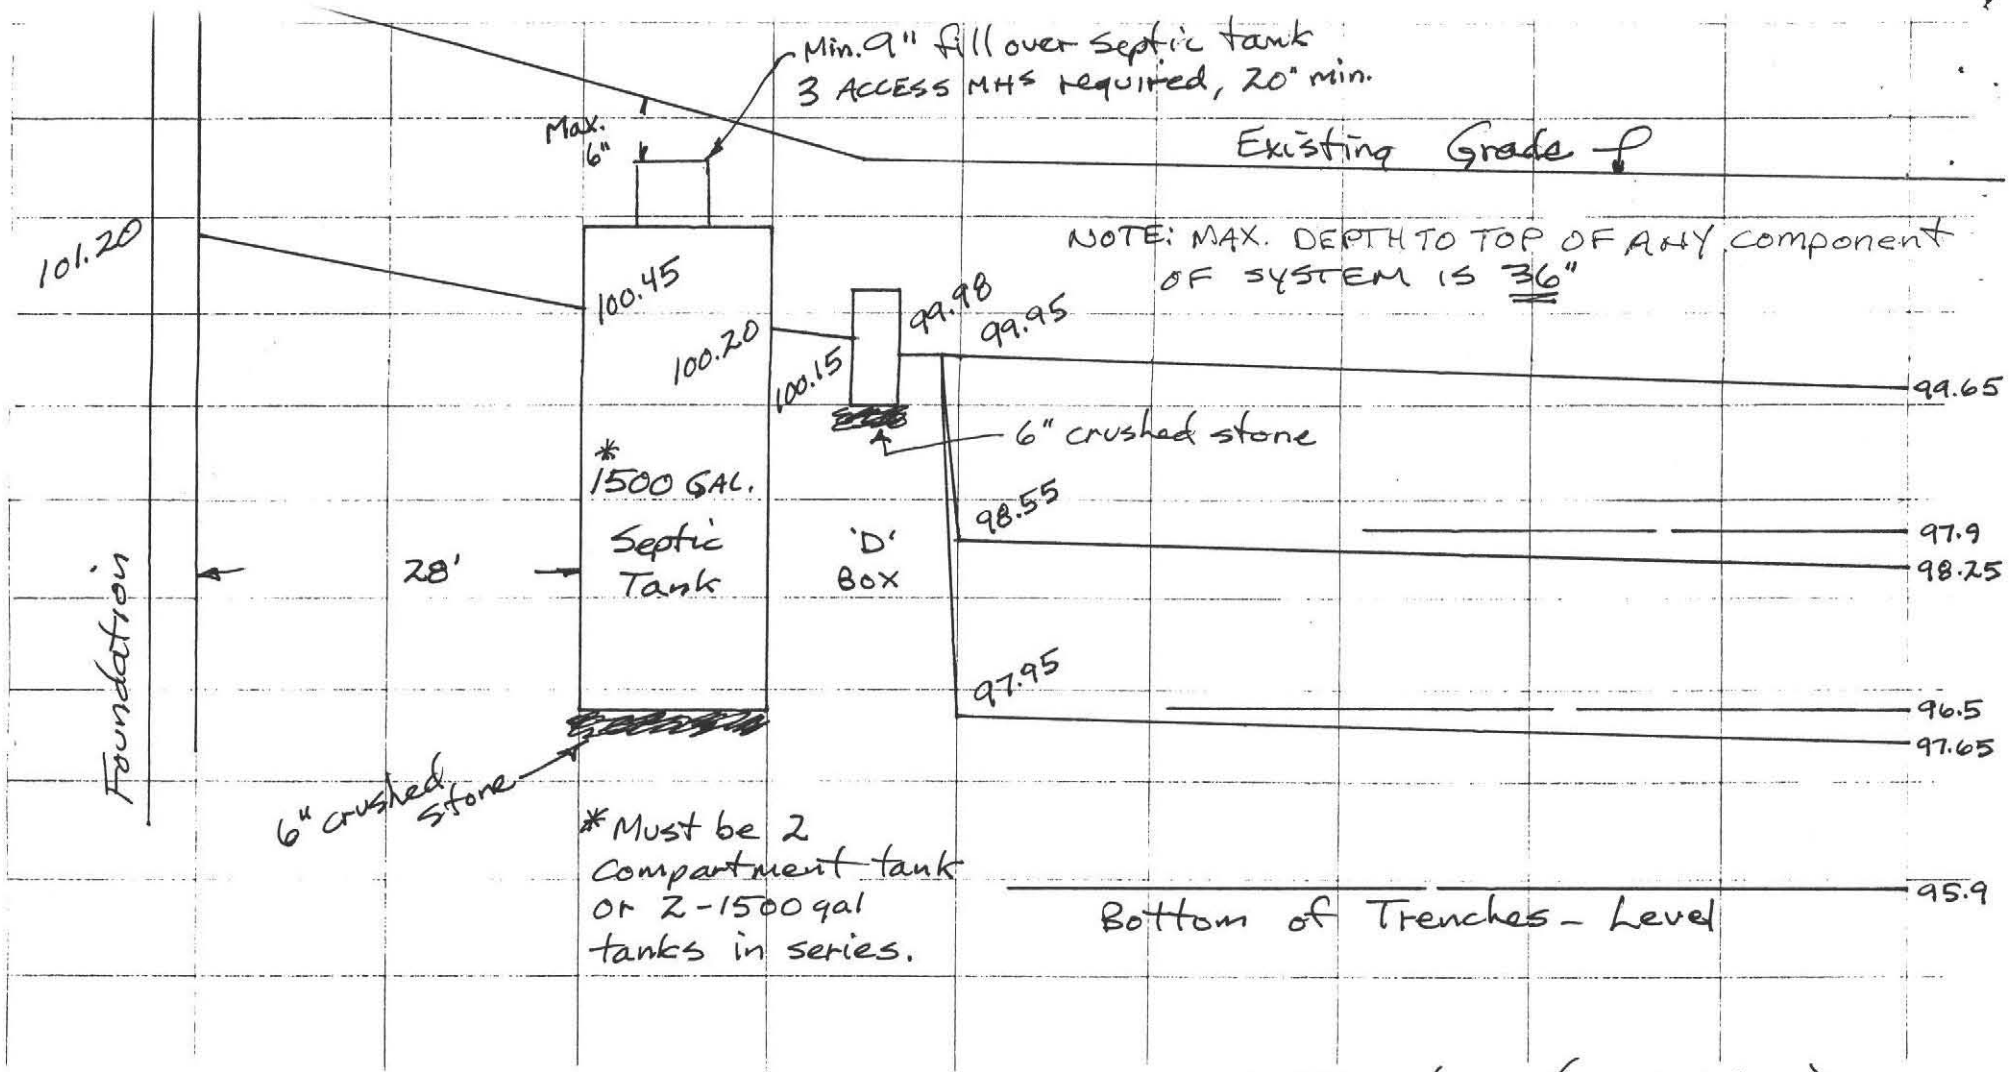


NOTES:

1. SEPTIC TANK SHALL HAVE INLET AND OUTLET TEES (15.227 TITLE V)
2. D-BOX SHALL HAVE 6" SUMP BELOW OUTLET INVERT (15.232(3e) TITLE V)
3. ACCESS MANHOLE TO SEPTIC TANK SHALL BE WITHIN 6" TO FINISHED GRADE
4. SEPTIC TANKS SHOULD BE INSPECTED ANNUALLY
5. ELEVATIONS ARE TO INVERTS UNLESS NOTED (INSIDE BOTTOM OF PIPE)
6. D-BOX OUTLET PIPES SHALL BE LEVEL MIN. 2.0 FT. (SECT. 15.232(3C) TITLE V)
7. END CAPS ON PIPES


PROFILE OF SYSTEM


SCALE HORZ. 1" = 10'

VERT. 1" = 2'

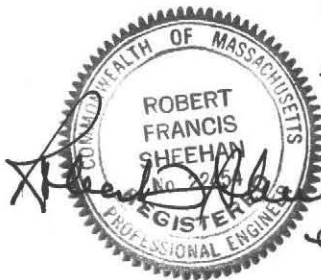


4/26/95

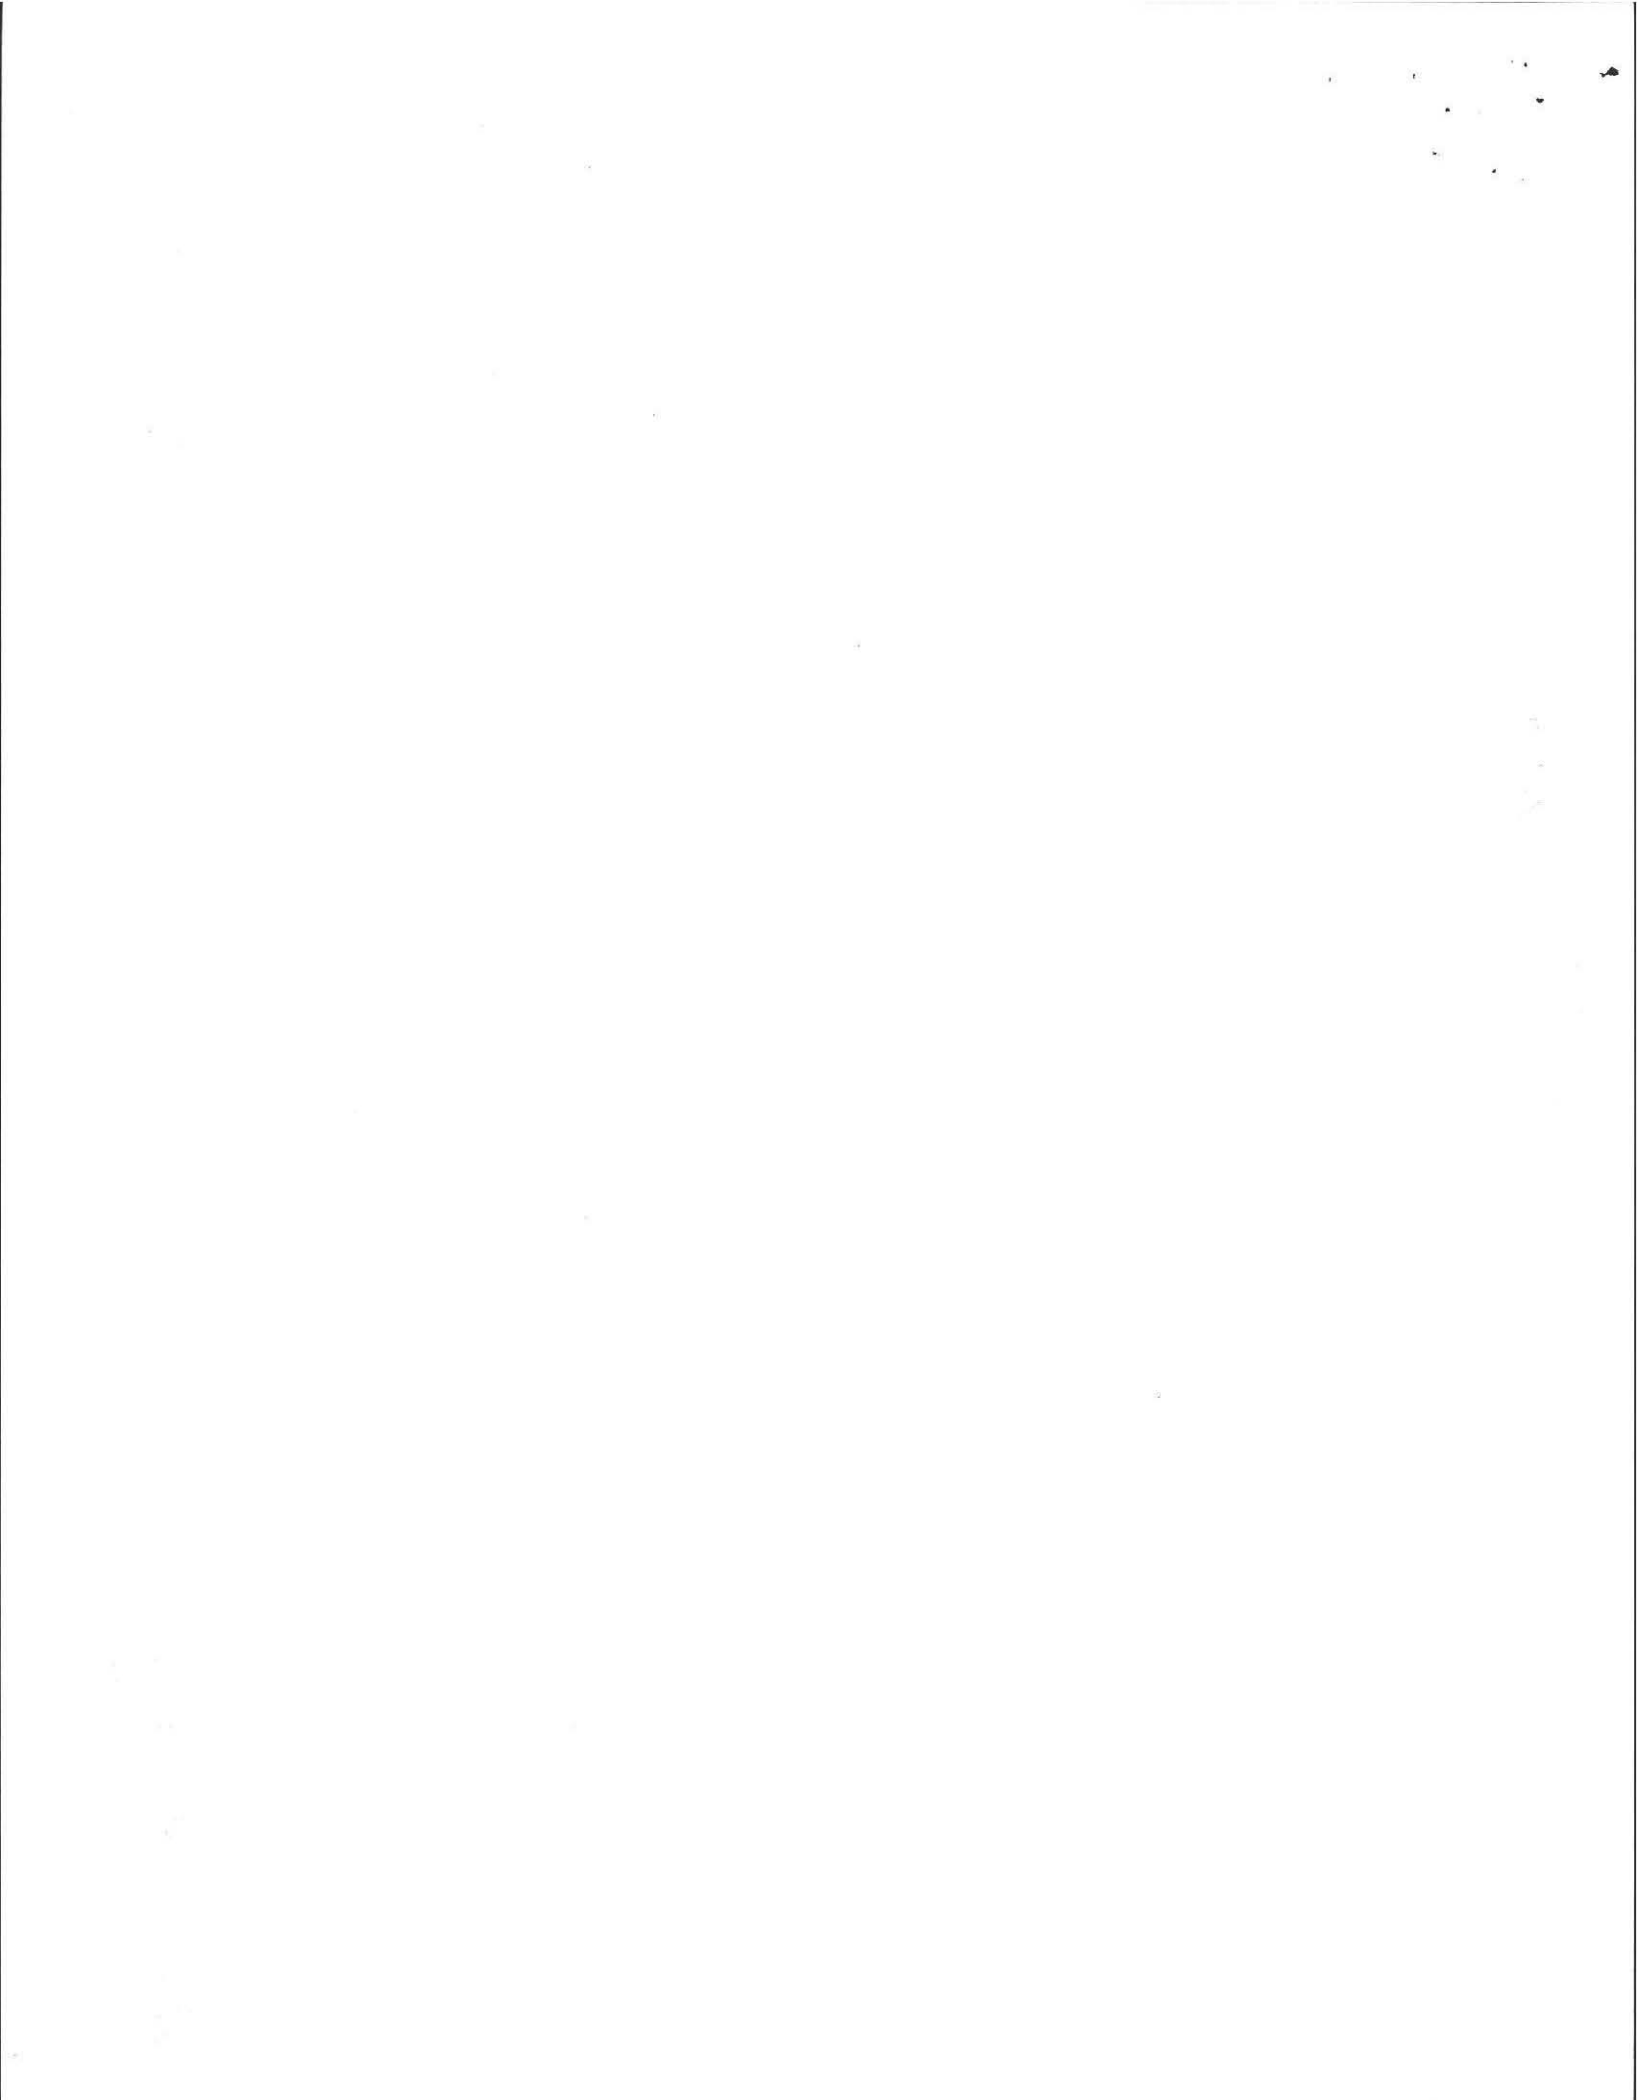


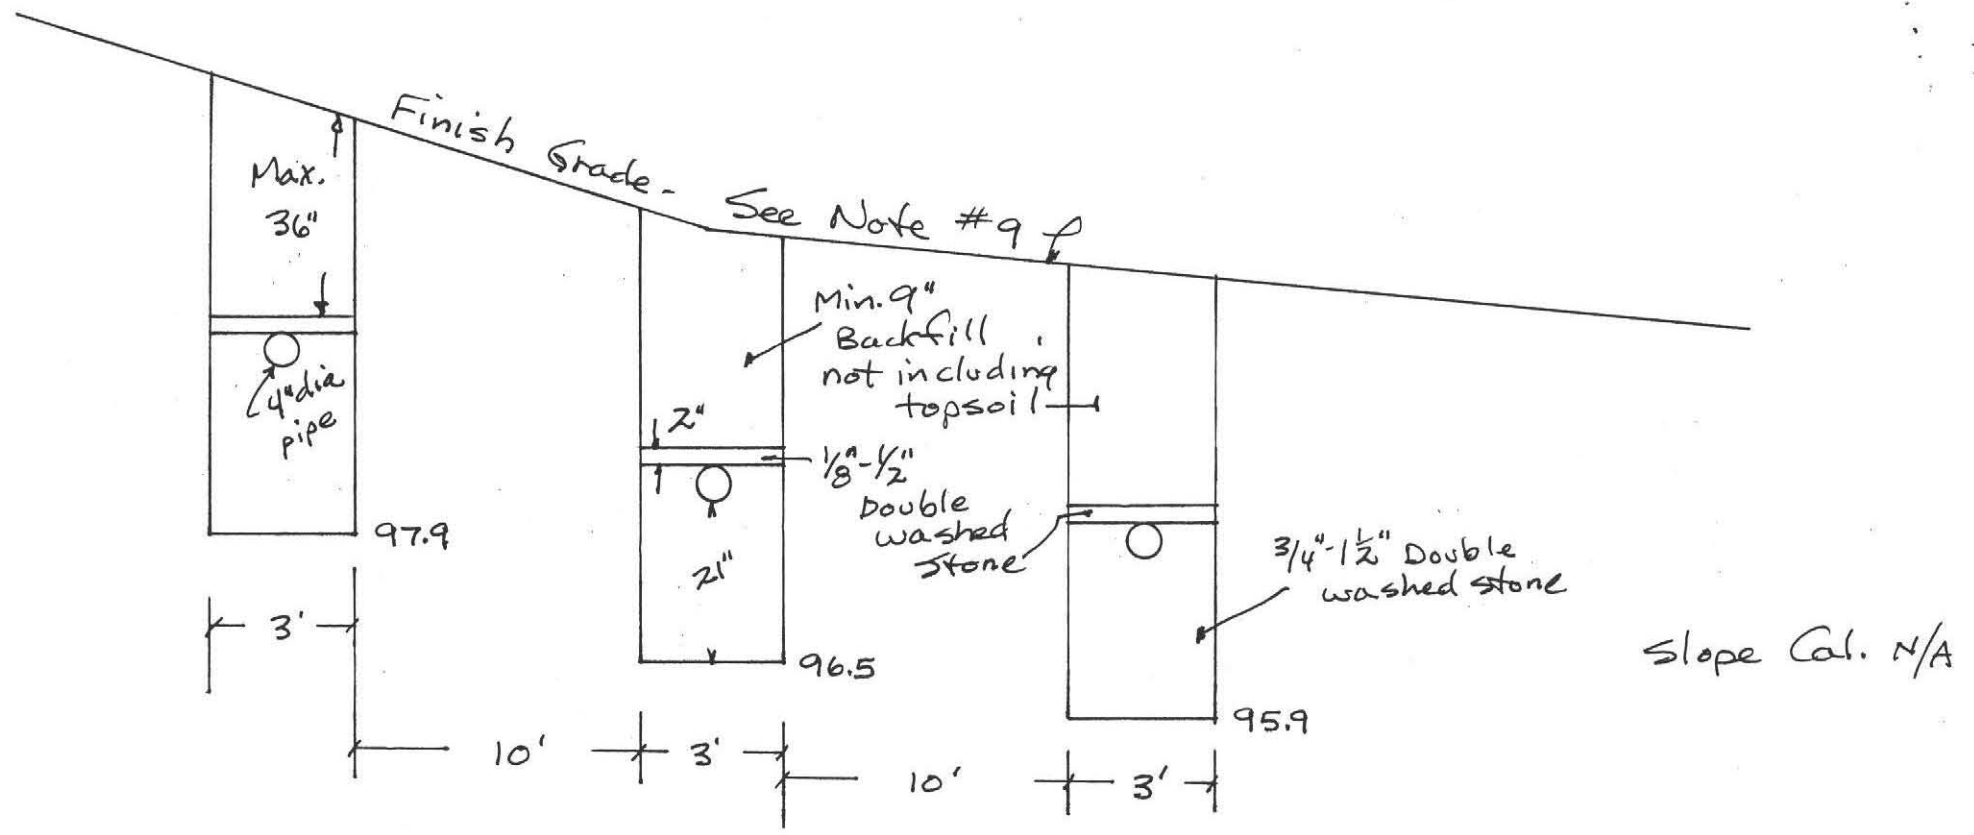

Slope Cal. N/A



Deep Hole #1




Deep Hole #2


NOTES:

- 8. ALL LOAM, SUBSOIL, AND OTHER IMPERVIOUS MATERIAL SHALL BE REMOVED WITHIN 5 FT. OF LEACHING FACILITY, SECT 15.255(5) TITLE V
- 9. FINISH GRADE ABOVE & ADJACENT TO SYSTEM SHALL SLOPE @ least 2% TO PREVENT ACCUMULATION OF SURFACE WATER.
- 10. FILL SHALL HAVE PERC RATE OF 2.0 min/in. BEFORE AND AFTER PLACEMENT.

CROSSSECTION OF SYSTEM
NO SCALE

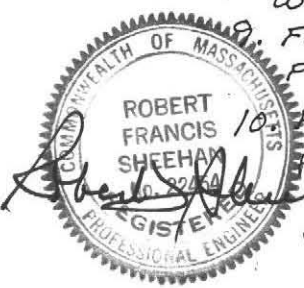

LOT 6
 Canterbury Lane
 Pg. 5

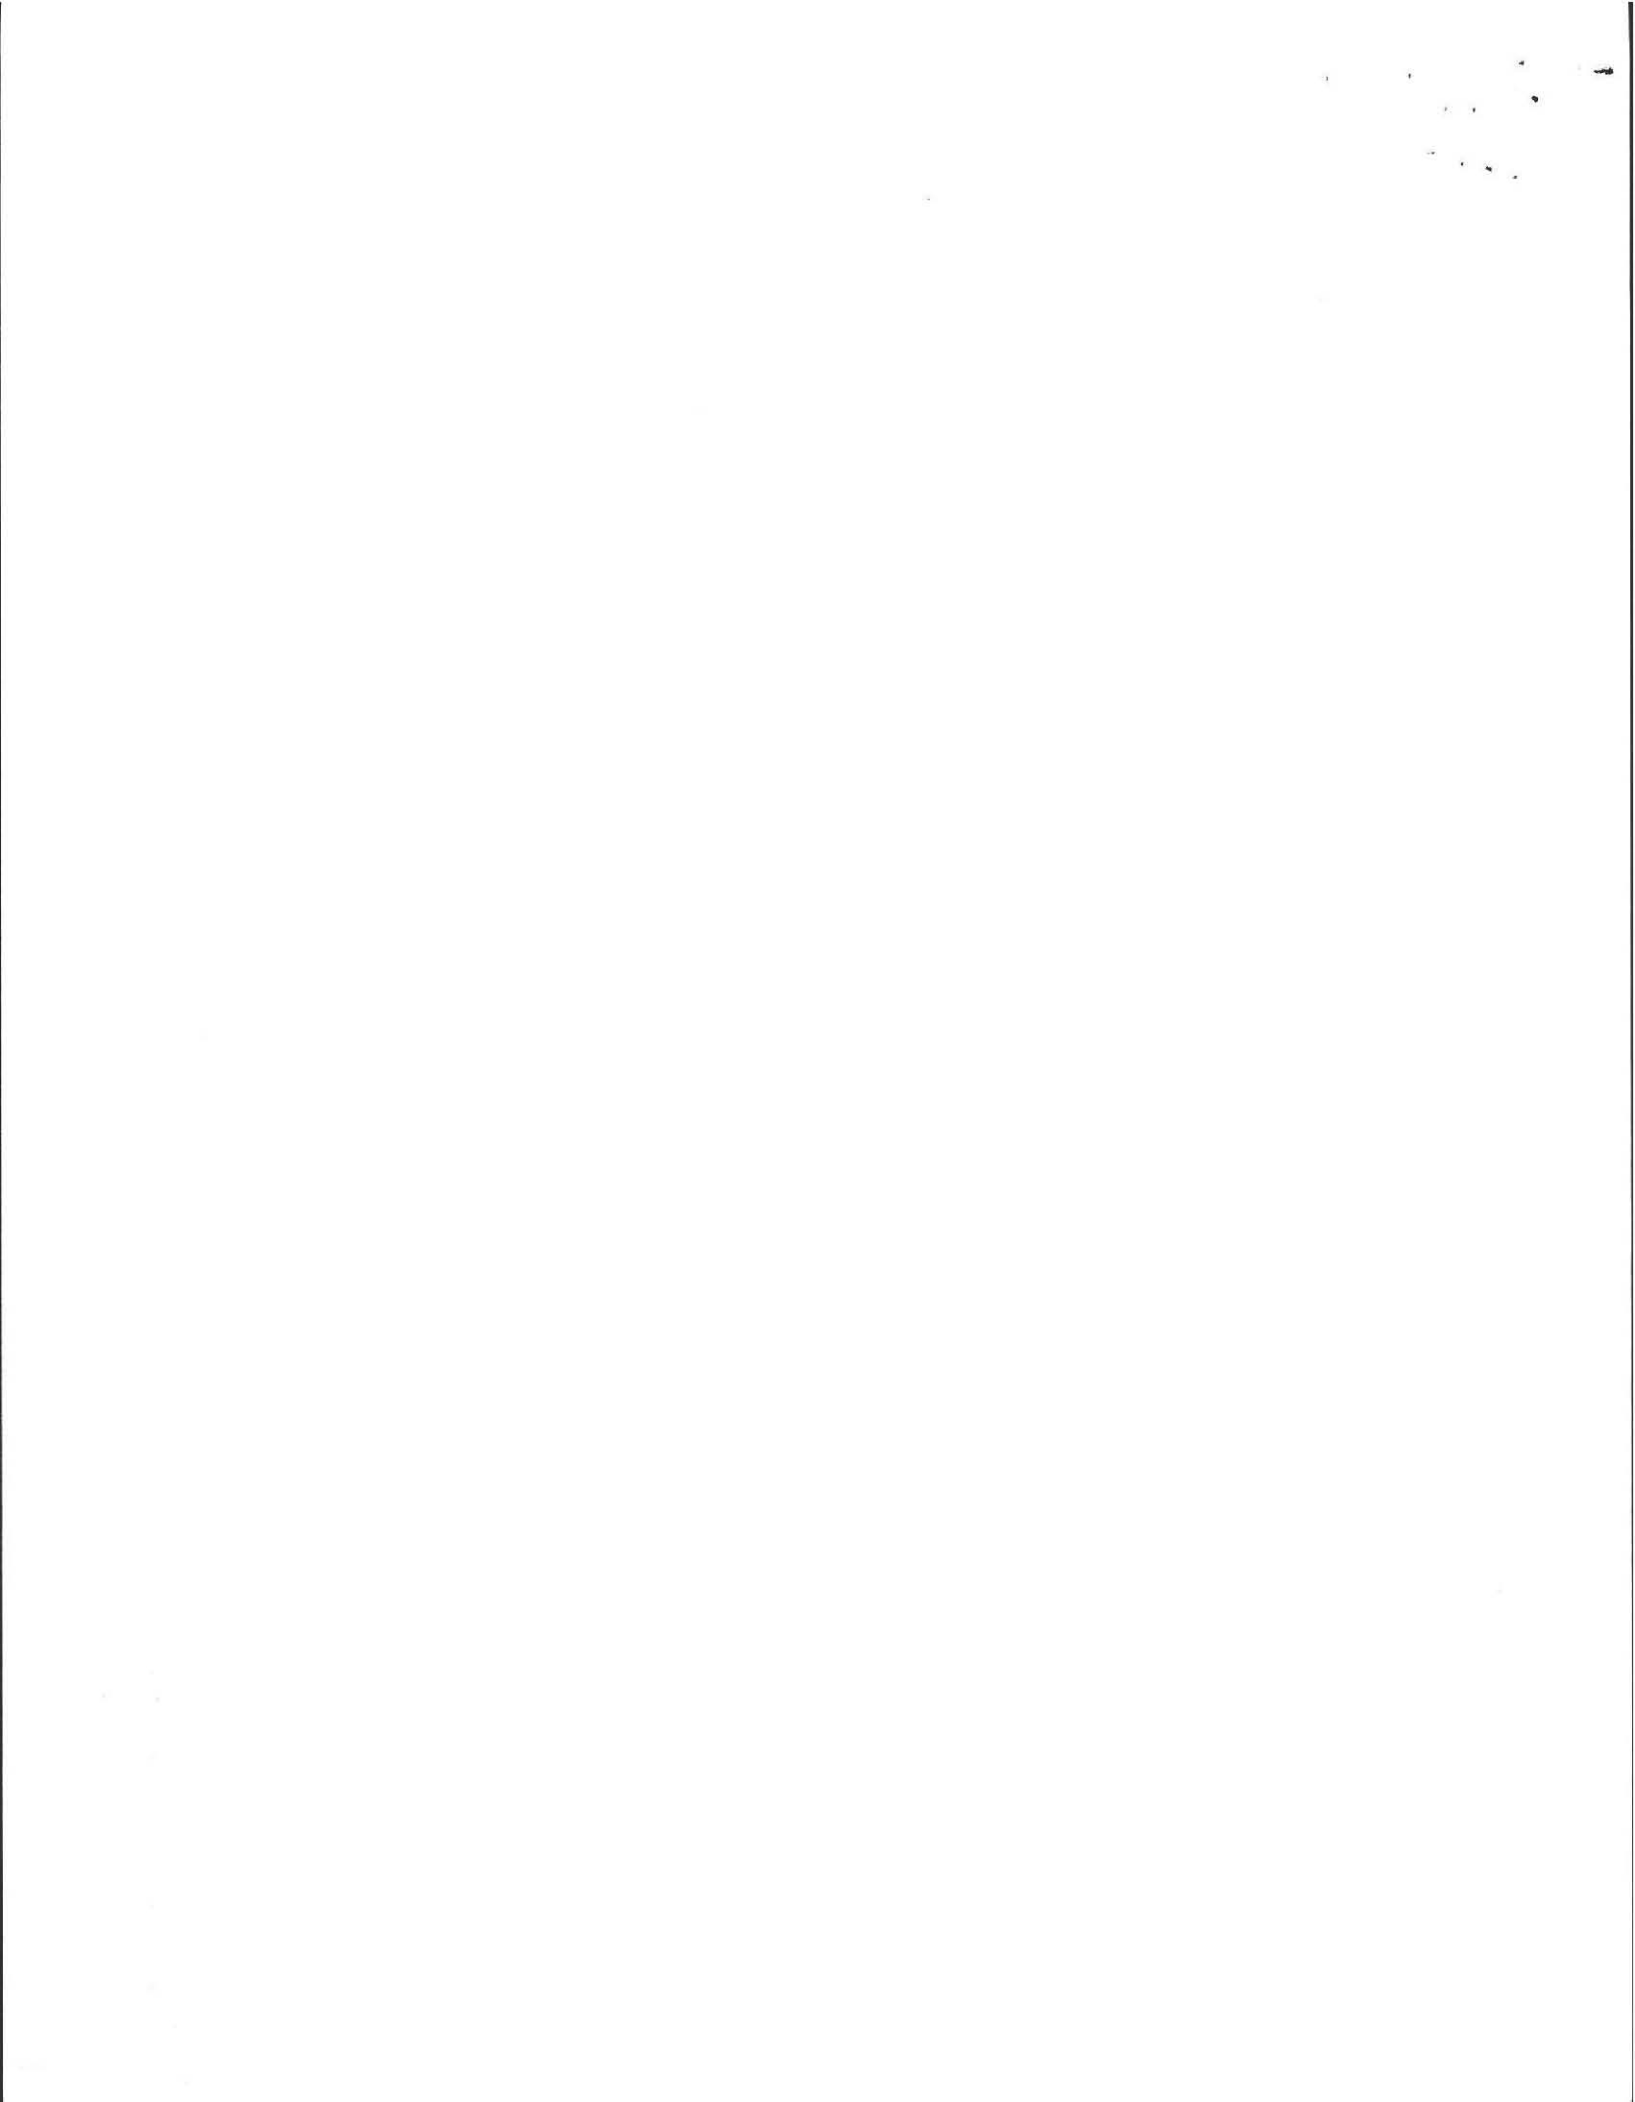


Lot 6 Pg. 2
 Canterbury Lane
 Scale 1"=40'
 April 25, 1995
 TOWN WATER

NO WETLANDS OBSERVED
 WITHIN 200' OF SYSTEM


LEGEND

- Δ - Deep Hole
- - 'D' Box
- - 1500 GAL. Septic Tank
- Existing Contours

Soil Evaluator
 Dave Zareginski

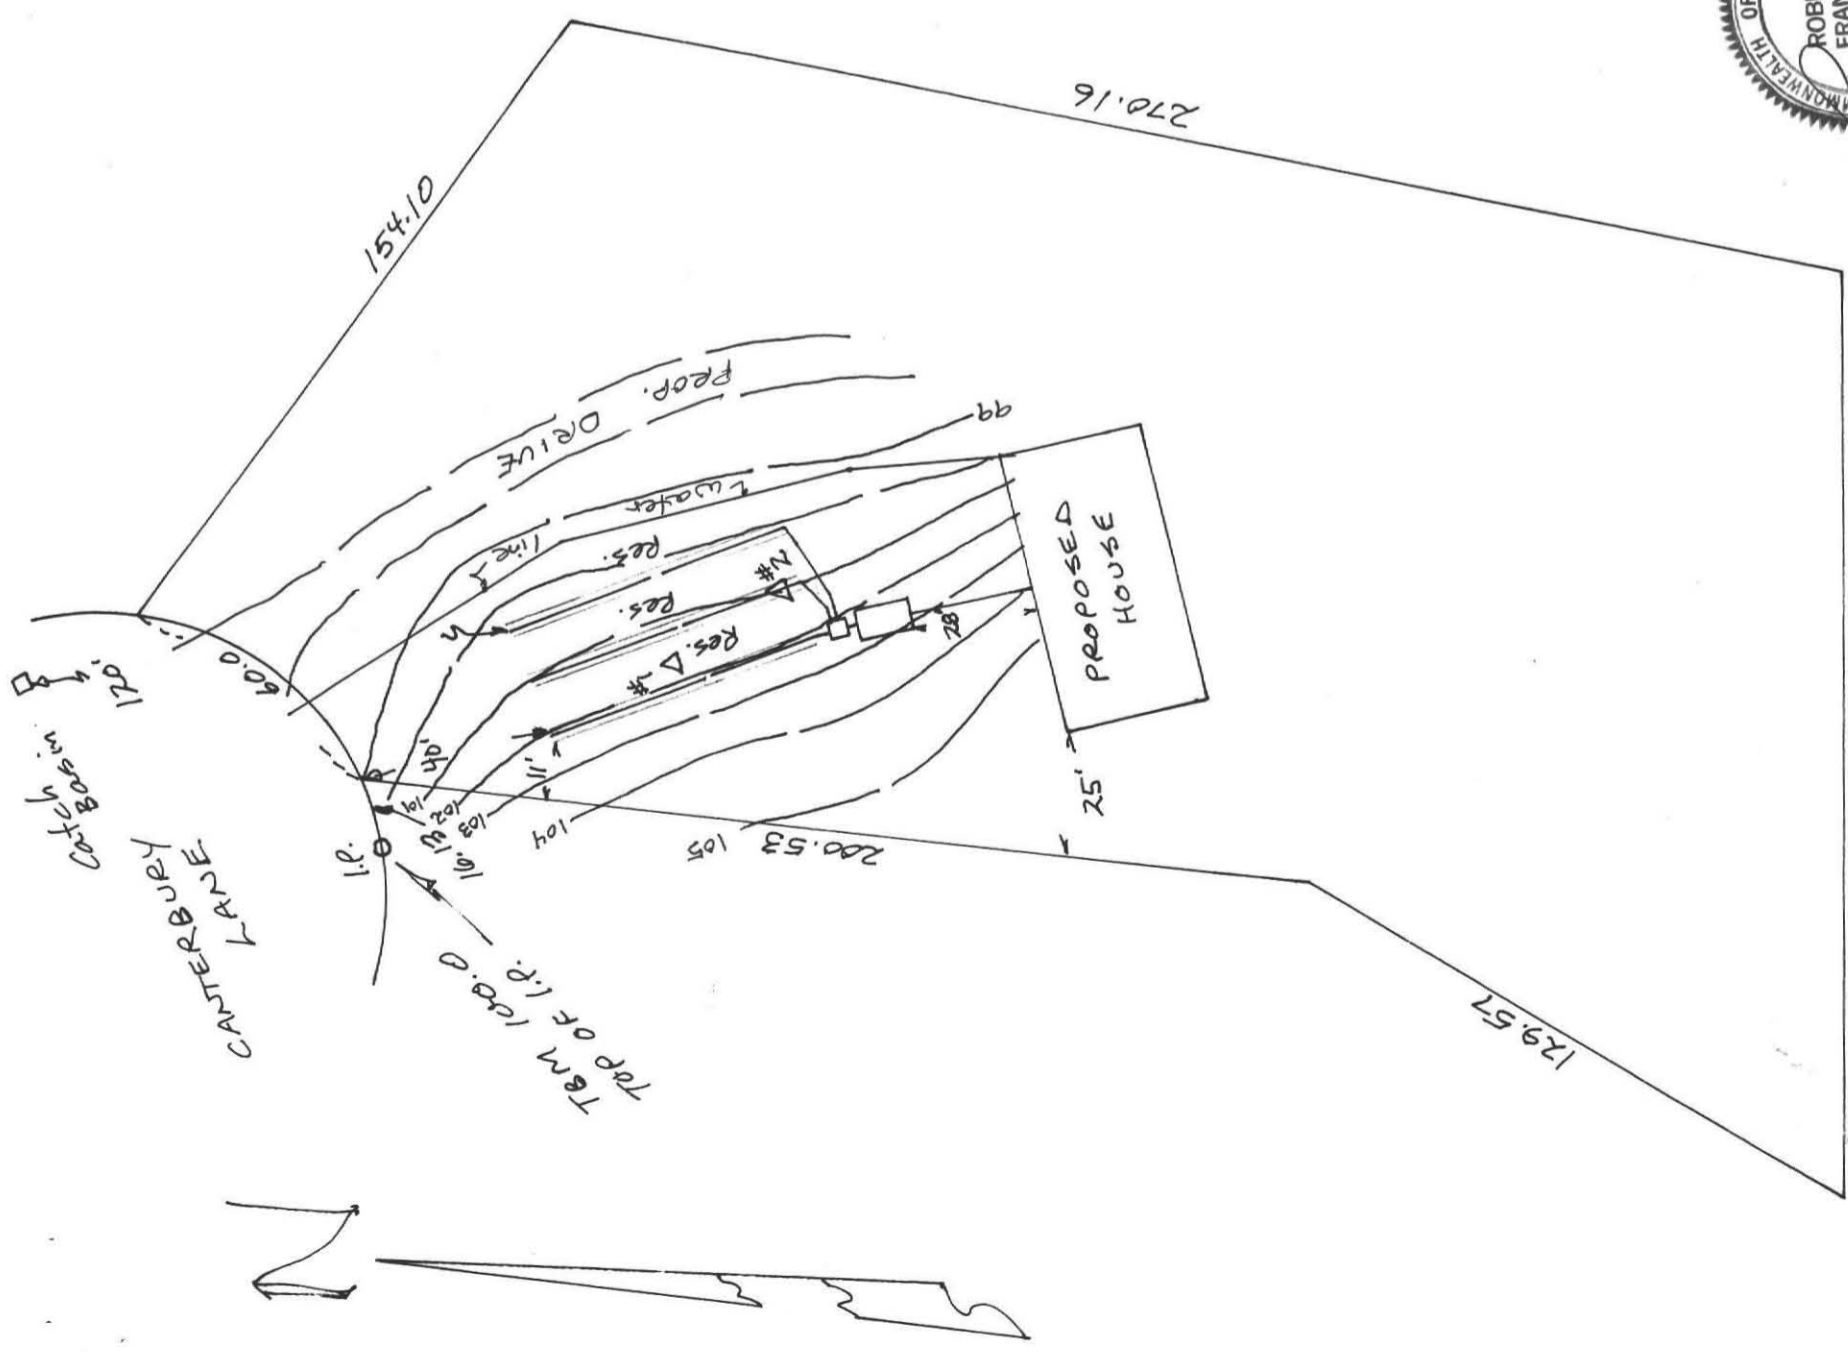

Design by Lewis & Cook
 Surveyors, Inc.

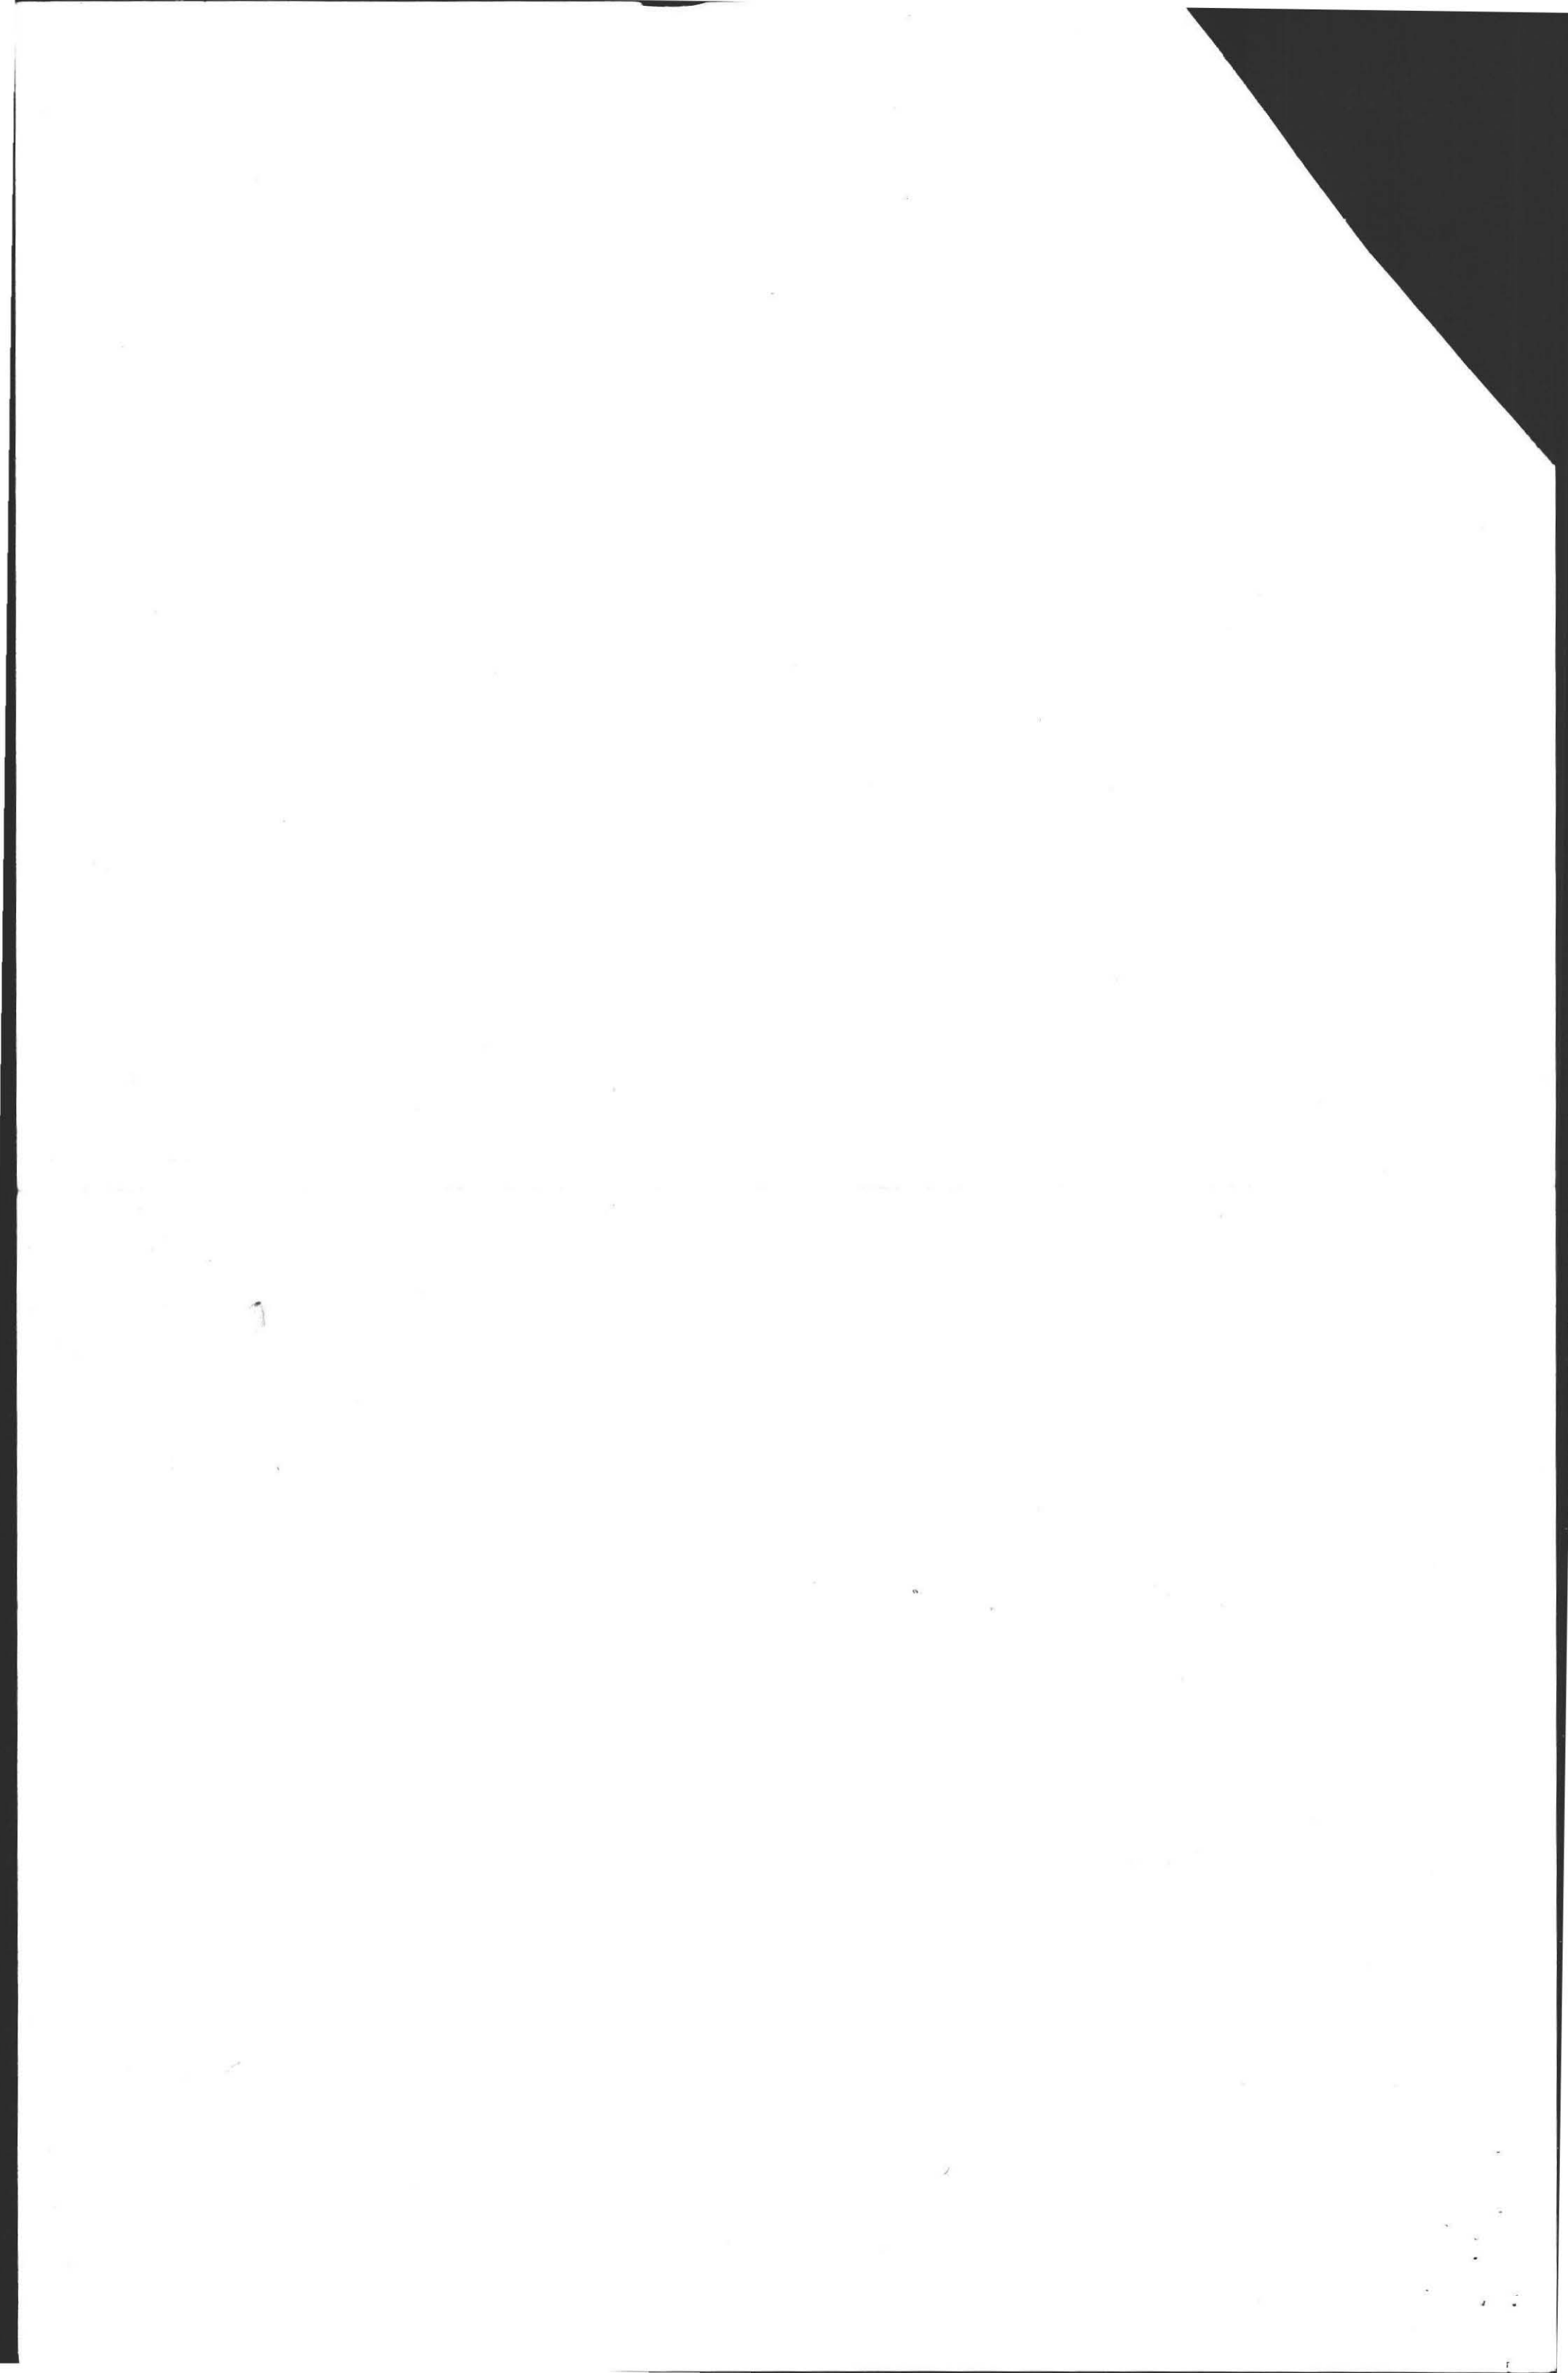

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART A
CERTIFICATION (continued)

Property Address: 24 LANTEMBERLY
Owner: SIMULAN
Date of Inspection: 6/4/99

INSPECTION SUMMARY: Check A, B, C, or D:

A. SYSTEM PASSES:

I have not found any information which indicates that any of the failure conditions described in 310 CMR 15.303 exist. Any failure criteria not evaluated are indicated below.

COMMENTS: _____

B. SYSTEM CONDITIONALLY PASSES:

_____ One or more system components as described in the "Conditional Pass" section need to be replaced or repaired. The system, upon completion of the replacement or repair, as approved by the Board of Health, will pass.

Indicate yes, no, or not determined (Y, N, or ND). Describe basis of determination in all instances. If "not determined", explain why not.

_____ The septic tank is metal, unless the owner or operator has provided the system inspector with a copy of a Certificate of Compliance (attached) indicating that the tank was installed within twenty (20) years prior to the date of the inspection; or the septic tank, whether or not metal, is cracked, structurally unsound, shows substantial infiltration or exfiltration, or tank failure is imminent. The system will pass inspection if the existing septic tank is replaced with a complying septic tank as approved by the Board of Health.

_____ Sewage backup or breakout or high static water level observed in the distribution box is due to broken or obstructed pipe(s) or due to a broken, settled or uneven distribution box. The system will pass inspection if (with approval of the Board of Health).
_____ broken pipe(s) are replaced
_____ obstruction is removed
_____ distribution box is levelled or replaced

_____ The system required pumping more than four times a year due to broken or obstructed pipe(s). The system will pass inspection if (with approval of the Board of Health):
_____ broken pipe(s) are replaced
_____ obstruction is removed



RECEIVED JUN 7 1999

COMMONWEALTH OF MASSACHUSETTS
EXECUTIVE OFFICE OF ENVIRONMENTAL AFFAIRS
DEPARTMENT OF ENVIRONMENTAL PROTECTION
ONE WINTER STREET, BOSTON MA 02108 (617) 292-5500

TRUDY COXE
Secretary

DAVID B. STRUHS
Commissioner

ARGEO PAUL CELLUCCI
Governor

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART A
CERTIFICATION

Property Address: 24 CANTERBURY LA.
AMHERST
Name of Owner: DAVID S. CLARK
Date of Inspection: 6/4/99
Address of Owner: 24 CANTERBURY LA.
Name of Inspector: (Please Print) Alan E. Weiss, R.S.
AMHERST, MA.
I am a DEP approved system inspector pursuant to Section 15.340 of Title 5 (310 CMR 15.000)
Company Name: Cold Spring Environmental, Inc.
Mailing Address: 350 Old Enfield Rd., Belchertown, MA 01007
Telephone Number: 413-323-5957

CERTIFICATION STATEMENT

I certify that I have personally inspected the sewage disposal system at this address and that the information reported below is true, accurate and complete as of the time of inspection. The inspection was performed based on my training and experience to determine proper function and maintenance of on-site sewage disposal systems. The system:

- Passes
- Conditionally Passes
- Needs Further Evaluation By the Local Approving Authority
- Fails

Inspector's Signature: Alan E. Weiss Date: 6/4/99



The System Inspector shall submit a copy of this inspection report to the Approving Authority (Board of Health or DEP) within thirty (30) days of completing this inspection. If the system is a shared system or has a design flow of 10,000 gpd or greater, the inspector and the system owner shall submit the report to the appropriate regional office of the Department of Environmental Protection. The original should be sent to the system owner and copies sent to the buyer, if applicable, and the approving authority.

NOTES AND COMMENTS

- GOOD DISTRIBUTION
- DESIGNED FOR DISPOSAL, BUT INSPECTOR DOES NOT RECOMMEND DISPOSALS.



**SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART A
CERTIFICATION (continued)**

Property Address: 24 CANTERBERRY
 Owner: S. W. CLARKE
 Date of Inspection: 6/4/99

D. SYSTEM FAILS:

You must indicate either "Yes" or "No" to each of the following:

_____ I have determined that one or more of the following failure conditions exist as described in 310 CMR 15.303. The basis for this determination is identified below. The Board of Health should be contacted to determine what will be necessary to correct the failure.

- | Yes | No | |
|--------------------------|--------------------------|--|
| <input type="checkbox"/> | <input type="checkbox"/> | Backup of sewage into facility or system component due to an overloaded or clogged SAS or cesspool. |
| <input type="checkbox"/> | <input type="checkbox"/> | Discharge or ponding of effluent to the surface of the ground or surface waters due to an overloaded or clogged SAS or cesspool. |
| <input type="checkbox"/> | <input type="checkbox"/> | Static liquid level in the distribution box above outlet invert due to an overloaded or clogged SAS or cesspool. |
| <input type="checkbox"/> | <input type="checkbox"/> | Liquid depth in cesspool is less than 6" below invert or available volume is less than 1/2 day flow. |
| <input type="checkbox"/> | <input type="checkbox"/> | Required pumping more than 4 times in the last year NOT due to clogged or obstructed pipe(s).
Number of times pumped _____. |
| <input type="checkbox"/> | <input type="checkbox"/> | Any portion of the Soil Absorption System, cesspool or privy is below the high groundwater elevation. |
| <input type="checkbox"/> | <input type="checkbox"/> | Any portion of a cesspool or privy is within 100 feet of a surface water supply or tributary to a surface water supply. |
| <input type="checkbox"/> | <input type="checkbox"/> | Any portion of a cesspool or privy is within a Zone I of a public well. |
| <input type="checkbox"/> | <input type="checkbox"/> | Any portion of a cesspool or privy is within 50 feet of a private water supply well. |
| <input type="checkbox"/> | <input type="checkbox"/> | Any portion of a cesspool or privy is less than 100 feet but greater than 50 feet from a private water supply well with no acceptable water quality analysis. If the well has been analyzed to be acceptable, attach copy of well water analysis for coliform bacteria, volatile organic compounds, ammonia nitrogen and nitrate nitrogen. |

E. LARGE SYSTEM FAILS:

You must indicate either "Yes" or "No" to each of the following:

The following criteria apply to large systems in addition to the criteria above:

_____ The system serves a facility with a design flow of 10,000 gpd or greater (Large System) and the system is a significant threat to public health and safety and the environment because one or more of the following conditions exist:

- | Yes | No | |
|--------------------------|--------------------------|---|
| <input type="checkbox"/> | <input type="checkbox"/> | the system is within 400 feet of a surface drinking water supply |
| <input type="checkbox"/> | <input type="checkbox"/> | the system is within 200 feet of a tributary to a surface drinking water supply |
| <input type="checkbox"/> | <input type="checkbox"/> | the system is located in a nitrogen sensitive area (Interim Wellhead Protection Area - IWPA) or a mapped Zone II of a public water supply well) |

The owner or operator of any such system shall upgrade the system in accordance with 310 CMR 15.304(2). Please consult the local regional office of the Department for further information.

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART A
CERTIFICATION (continued)

Property Address: 24 CANTERBERRY
Owner: SILKIN
Date of Inspection: 6/4/99

C. FURTHER EVALUATION IS REQUIRED BY THE BOARD OF HEALTH:

_____ Conditions exist which require further evaluation by the Board of Health in order to determine if the system is failing to protect the public health, safety and the environment.

1) **SYSTEM WILL PASS UNLESS BOARD OF HEALTH DETERMINES IN ACCORDANCE WITH 310 CMR 15.303 (1)(b) THAT THE SYSTEM IS NOT FUNCTIONING IN A MANNER WHICH WILL PROTECT THE PUBLIC HEALTH AND SAFETY AND THE ENVIRONMENT:**

- ___ Cesspool or privy is within 50 feet of surface water
- ___ Cesspool or privy is within 50 feet of a bordering vegetated wetland or a salt marsh.

2) **SYSTEM WILL FAIL UNLESS THE BOARD OF HEALTH (AND PUBLIC WATER SUPPLIER, IF ANY) DETERMINES THAT THE SYSTEM IS FUNCTIONING IN A MANNER THAT PROTECTS THE PUBLIC HEALTH AND SAFETY AND THE ENVIRONMENT:**

- ___ The system has a septic tank and soil absorption system (SAS) and the SAS is within 100 feet of a surface water supply or tributary to a surface water supply.
- ___ The system has a septic tank and soil absorption system and the SAS is within a Zone I of a public water supply well.
- ___ The system has a septic tank and soil absorption system and the SAS is within 50 feet of a private water supply well.
- ___ The system has a septic tank and soil absorption system and the SAS is less than 100 feet but 50 feet or more from a private water supply well, unless a well water analysis for coliform bacteria and volatile organic compounds indicates that the well is free from pollution from that facility and the presence of ammonia nitrogen and nitrate nitrogen is equal to or less than 5 ppm. Method used to determine distance _____ (approximation not valid).

3) OTHER

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART C
SYSTEM INFORMATION

Property Address: 24 CANTERBURY
Owner: SINCLAIR
Date of Inspection: 6/4/99

FLOW CONDITIONS

RESIDENTIAL:

Design flow: 440 g.p.d./bedroom.
Number of bedrooms (design): 4 Number of bedrooms (actual):
Total DESIGN flow 440
Number of current residents: 4
Garbage grinder (yes or no): Y ~~X~~ NOT RECOMMENDED
Laundry (separate system) (yes or no): N; If yes, separate inspection required
Laundry system inspected (yes or no)
Seasonal use (yes or no): N
Water meter readings, if available (last two year's usage (gpd): N/A
Sump Pump (yes or no): N
Last date of occupancy: current

COMMERCIAL/INDUSTRIAL:

Type of establishment: N/A
Design flow: gpd (Based on 15.203)
Basis of design flow
Grease trap present: (yes or no)
Industrial Waste Holding Tank present: (yes or no)
Non-sanitary waste discharged to the Title 5 system: (yes or no)
Water meter readings, if available:
Last date of occupancy:

OTHER: (Describe)
Last date of occupancy:

GENERAL INFORMATION

PUMPING RECORDS and source of information: 3 yrs. (new)
System pumped as part of inspection: (yes or no) Y
If yes, volume pumped: 1500 gallons
Reason for pumping: TIME

TYPE OF SYSTEM

- Septic tank/distribution box/soil absorption system
 - Single cesspool
 - Overflow cesspool
 - Privy
 - Shared system (yes or no) (if yes, attach previous inspection records, if any)
 - I/A Technology etc. Attach copy of up to date operation and maintenance contract
 - Tight Tank Copy of DEP Approval
- Other

APPROXIMATE AGE of all components, date installed (if known) and source of information: 3 yrs.

Sewage odors detected when arriving at the site: (yes or no) N

**SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART B
CHECKLIST**

Property Address: 24 CANTERBURY
 Owner: S. WILLARD
 Date of Inspection: 6/4/99

Check if the following have been done: You must indicate either "Yes" or "No" as to each of the following:

- | Yes | No | |
|-------------------------------------|--------------------------|--|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | Pumping information was provided by the owner, occupant, or Board of Health. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | None of the system components have been pumped for at least two weeks and the system has been receiving normal flow rates during that period. Large volumes of water have not been introduced into the system recently or as part of this inspection. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | As built plans have been obtained and examined. Note if they are not available with N/A. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The facility or dwelling was inspected for signs of sewage back-up. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The system does not receive non-sanitary or industrial waste flow. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The site was inspected for signs of breakout. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | All system components, excluding the Soil Absorption System, have been located on the site. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The septic tank manholes were uncovered, opened, and the interior of the septic tank was inspected for condition of baffles or tees, material of construction, dimensions, depth of liquid, depth of sludge, depth of scum. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The size and location of the Soil Absorption System on the site has been determined based on: |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | Existing information. For example, Plan at B.O.H. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | Determined in the field (if any of the failure criteria related to Part C is at issue, approximation of distance is unacceptable) [15.302(3)(b)] |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | The facility owner (and occupants, if different from owner) were provided with information on the proper maintenance of SubSurface Disposal Systems. |

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART C
SYSTEM INFORMATION (continued)

Property Address: 24 CANTERBURY
Owner: SINCLAIR
Date of Inspection: 6/4/99

TIGHT OR HOLDING TANK: N (Tank must be pumped prior to, or at time of, inspection)
(locate on site plan)

Depth below grade: _____
Material of construction: ___concrete ___metal ___Fiberglass ___Polyethylene ___other(explain)

Dimensions: _____
Capacity: _____ gallons
Design flow: _____ gallons/day
Alarm present _____
Alarm level: _____ Alarm in working order: Yes ___ No ___
Date of previous pumping: _____
Comments:
(condition of inlet tee, condition of alarm and float switches, etc.)

DISTRIBUTION BOX: Y
(locate on site plan)

Depth of liquid level above outlet invert: AT INU. - OK.

Comments:
(note if level and distribution is equal, evidence of solids carryover, evidence of leakage into or out of box, etc.)
D. Box ok, some slight degrade of inside wall.

PUMP CHAMBER: N
(locate on site plan)

Pumps in working order: (Yes or No) _____
Alarms in working order (Yes or No) _____
Comments:
(note condition of pump chamber, condition of pumps and appurtenances, etc.) _____

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM

PART C

SYSTEM INFORMATION (continued)

Property Address: 24 CAUTERBERG
Owner: SINCLAIR
Date of Inspection: 6/4/99

BUILDING SEWER:

(Locate on site plan)

Depth below grade: 20"
Material of construction: cast iron 40 PVC other (explain)

Distance from private water supply well or suction line 10' f

Diameter 4" ϕ

Comments: (condition of joints, venting, evidence of leakage, etc.)

OK

SEPTIC TANK: (TWO CHAMBER)

(locate on site plan)

Depth below grade: 20"
Material of construction: concrete metal Fiberglass Polyethylene other(explain)

If tank is metal, list age ___ Is. age confirmed by Certificate of Compliance ___ (Yes/No)

Dimensions: 10.5' x 4.5' x 5.0' (TWO CHAMBER)

Sludge depth: 4"

Distance from top of sludge to bottom of outlet tee or baffle: 26"

Scum thickness: 2'

Distance from top of scum to top of outlet tee or baffle: 6"

Distance from bottom of scum to bottom of outlet tee or baffle: 18"

How dimensions were determined: meas.

Comments:

(recommendation for pumping, condition of inlet and outlet tees or baffles, depth of liquid level in relation to outlet invert, structural integrity, evidence of leakage, etc.) good condition

GREASE TRAP: N/A

(locate on site plan)

Depth below grade: ___
Material of construction: concrete metal Fiberglass Polyethylene other(explain)

Dimensions: _____

Scum thickness: _____

Distance from top of scum to top of outlet tee or baffle: _____

Distance from bottom of scum to bottom of outlet tee or baffle: _____

Date of last pumping: _____

Comments:

(recommendation for pumping, condition of inlet and outlet tees or baffles, depth of liquid level in relation to outlet invert, structural integrity, evidence of leakage, etc.)


**SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART C
SYSTEM INFORMATION (continued)**

Property Address: **Z4 CANTERBERRY**
 Owner: **SINCLAIR**
 Date of Inspection: **6/4/99**

SKETCH OF SEWAGE DISPOSAL SYSTEM:

include ties to at least two permanent reference landmarks or benchmarks
 locate all wells within 100' (Locate where public water supply comes into house)

(NTS)

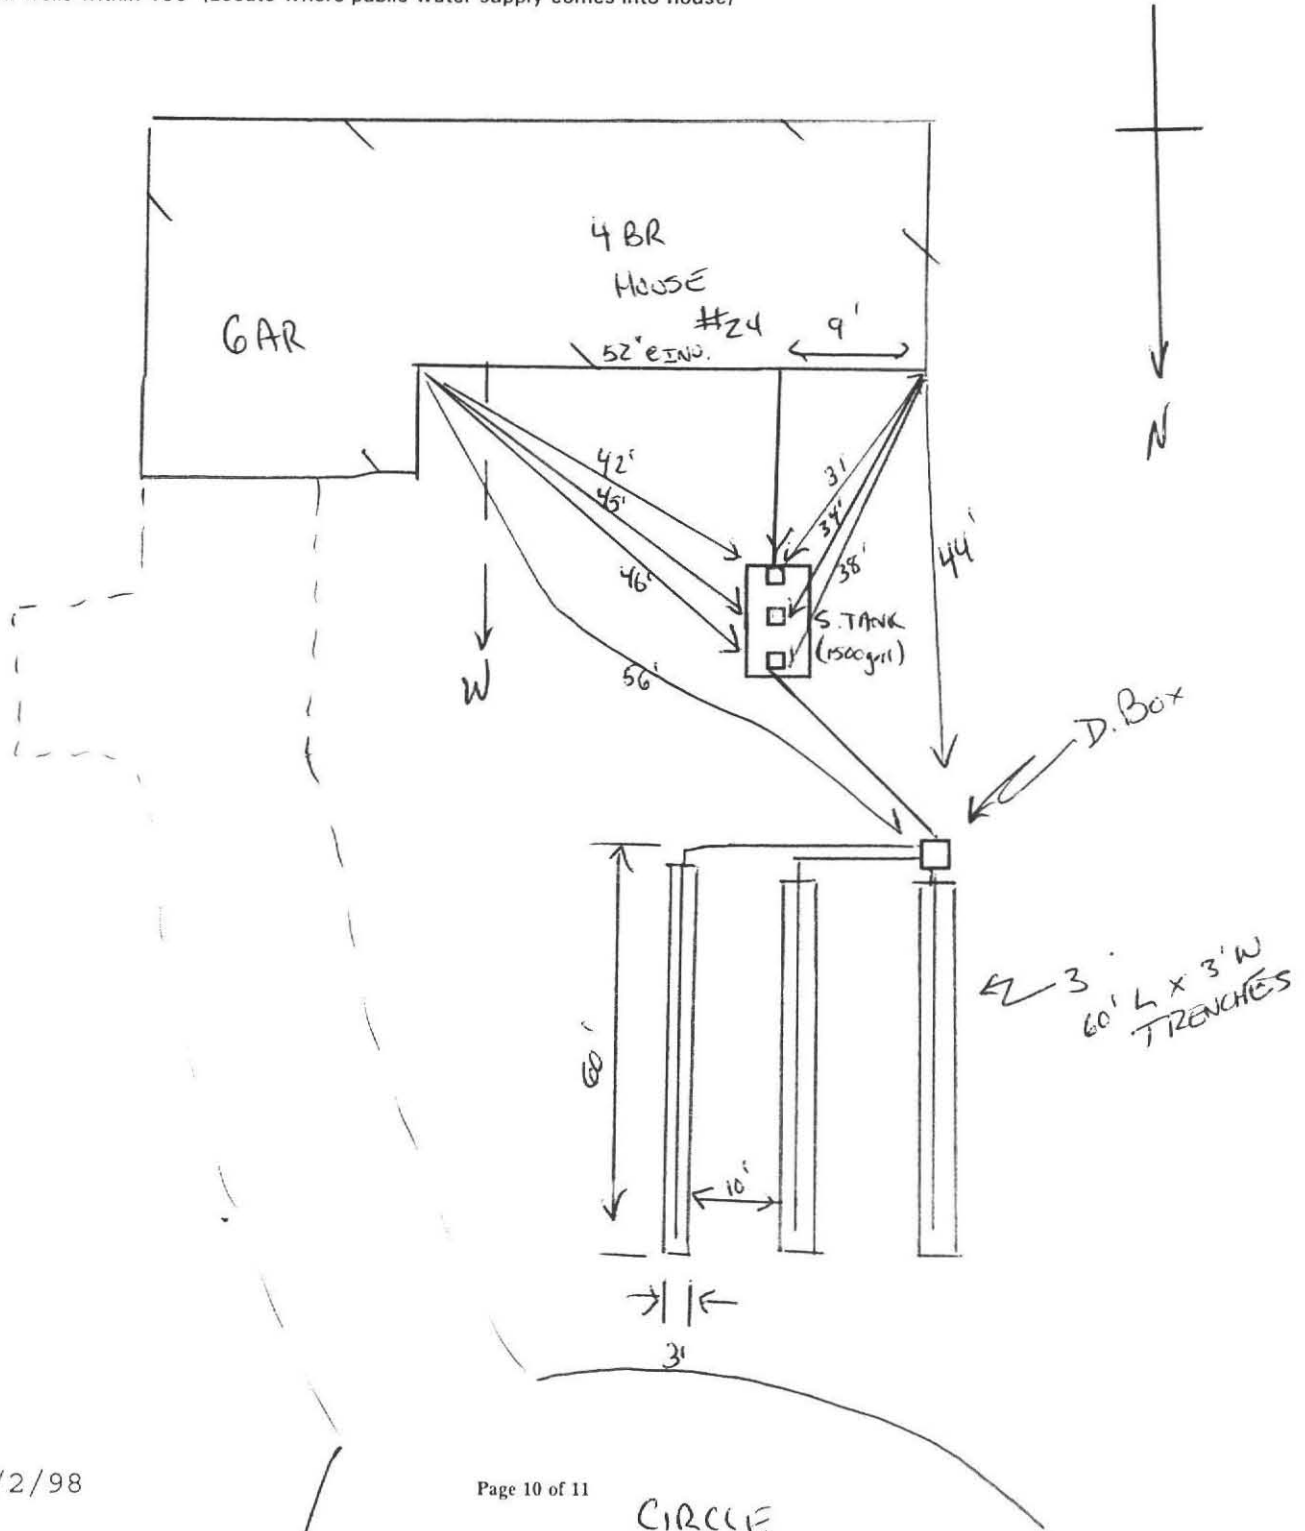

SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART C
SYSTEM INFORMATION (continued)

Property Address: 24 CANTERBURY
Owner: SINCLAIR
Date of Inspection: 6/4/99

SOIL ABSORPTION SYSTEM (SAS):

(locate on site plan, if possible; excavation not required, location may be approximated by non-intrusive methods)

If not located, explain:

Type:

leaching pits, number: _____
leaching chambers, number: _____
leaching galleries, number: _____
leaching trenches, number, length: (3) 3'x60'
leaching fields, number, dimensions: _____
overflow cesspool, number: _____
Alternative system: _____
Name of Technology: _____

Comments:

(note condition of soil, signs of hydraulic failure, level of ponding, damp soil, condition of vegetation, etc.)

OK.

CESSPOOLS:

(locate on site plan)

Number and configuration: _____
Depth-top of liquid to inlet invert: _____
Depth of solids layer: _____
Depth of scum layer: _____
Dimensions of cesspool: _____
Materials of construction: _____
Indication of groundwater: _____
inflow (cesspool must be pumped as part of inspection) _____

Comments:

(note condition of soil, signs of hydraulic failure, level of ponding, condition of vegetation, etc.)

PRIVY:


(locate on site plan)

Materials of construction: _____ Dimensions: _____

Depth of solids: _____

Comments:

(note condition of soil, signs of hydraulic failure, level of ponding, condition of vegetation, etc.)

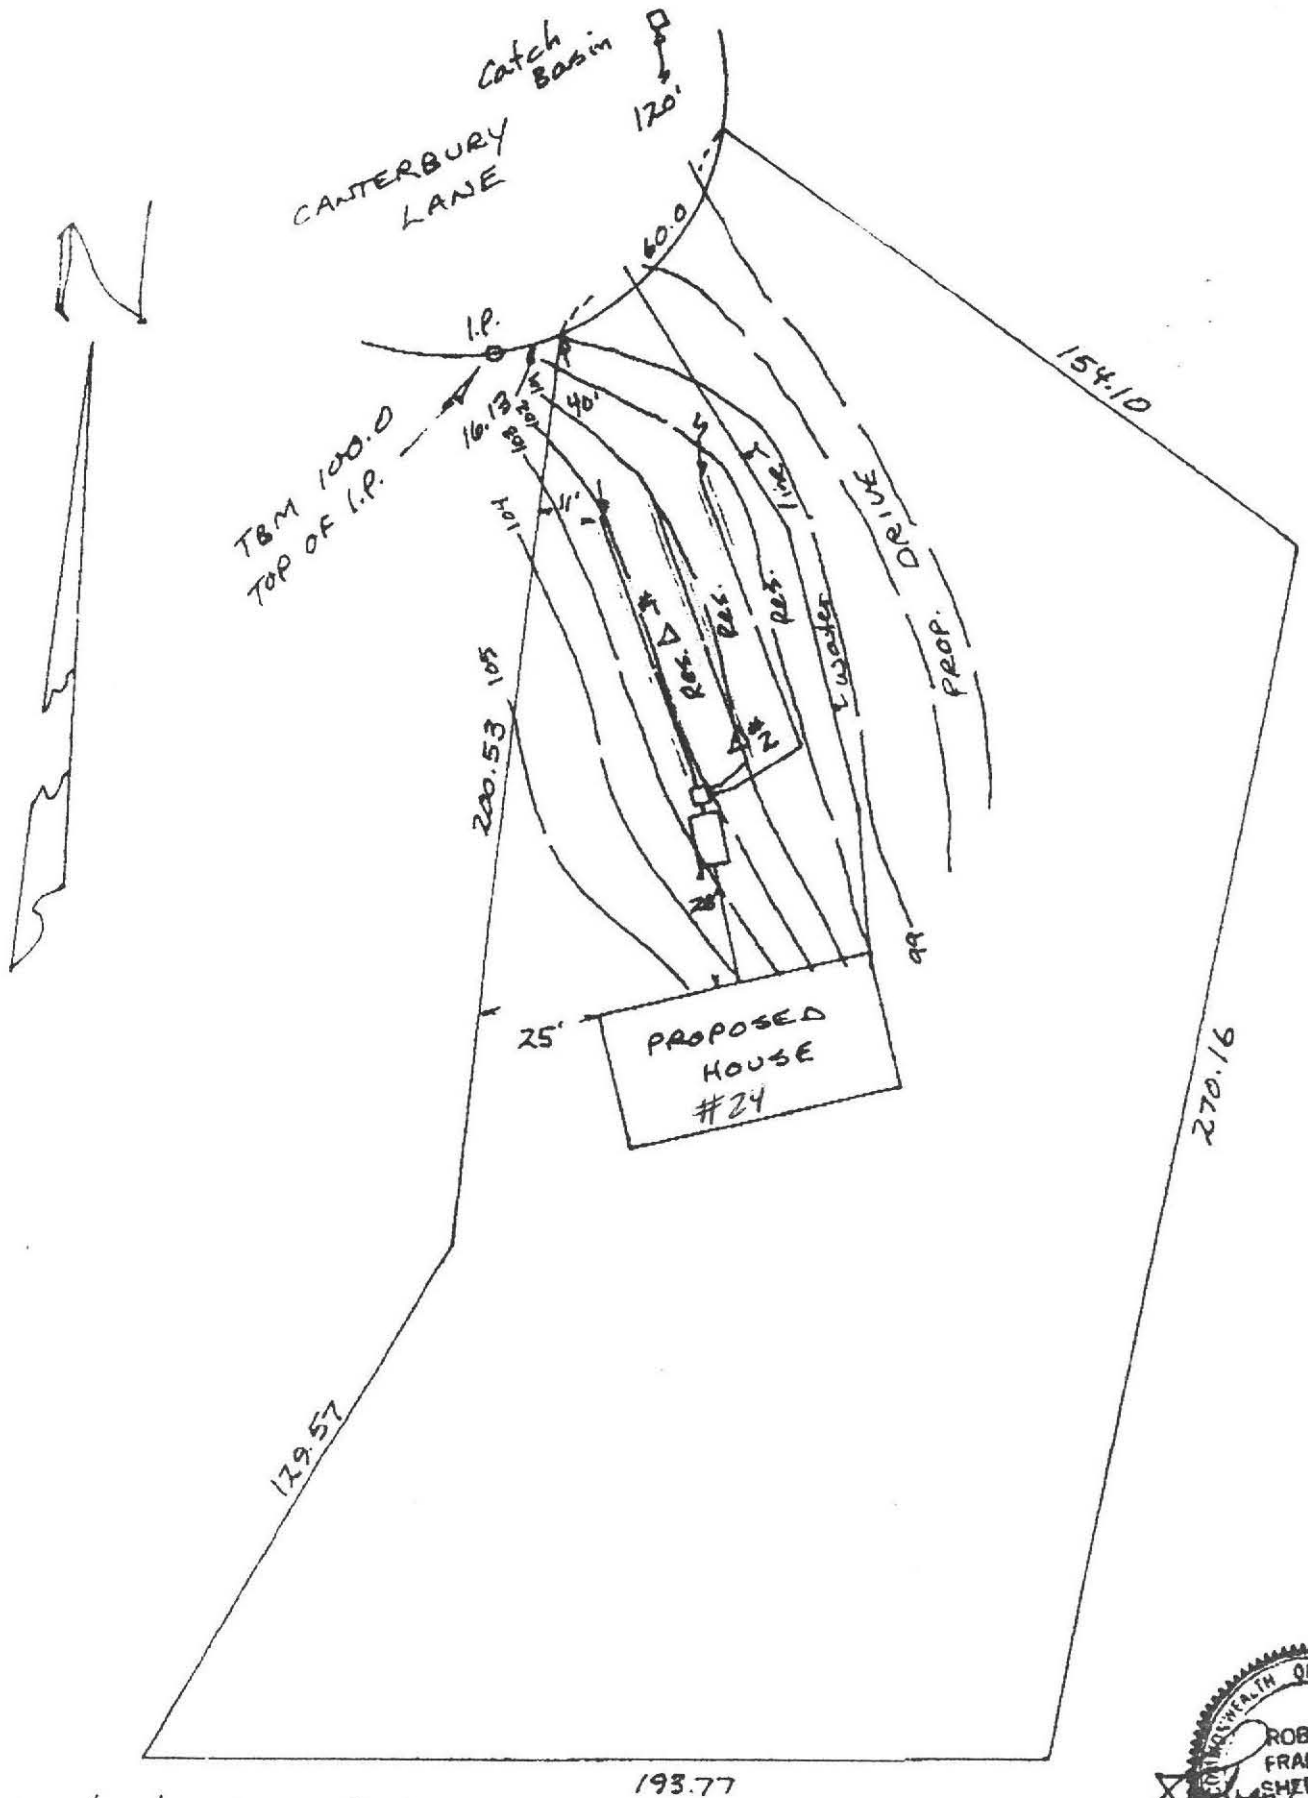

Design by Lewis & Cook
Surveyors, Inc.



SUBSURFACE SEWAGE DISPOSAL SYSTEM INSPECTION FORM
PART C
SYSTEM INFORMATION (continued)

Property Address: 24 CANTERBURY
Owner: SWICLAN
Date of Inspection: 6/4/99

NRCS Report name _____
Soil Type _____
Typical depth to groundwater _____

USGS Date website visited _____
Observation Wells checked _____
Groundwater depth: Shallow _____ Moderate _____ Deep _____

SITE EXAM Slope _____
Surface water _____
Check Cellar _____
Shallow wells _____


Estimated Depth to Groundwater 10' Feet ±

Please indicate all the methods used to determine High Groundwater Elevation:

- Obtained from Design Plans on record
- Observed Site (Abutting property, observation hole, basement sump etc.)
- Determined from local conditions
- Checked with local Board of health
- Checked FEMA Maps
- Checked pumping records
- Checked local excavators, installers
- Used USGS Data

Describe how you established the High Groundwater Elevation. (Must be completed)

* SOIL ADJACENT TO D. Box, 1995 per logs.; TOPO: + VEGETATION.

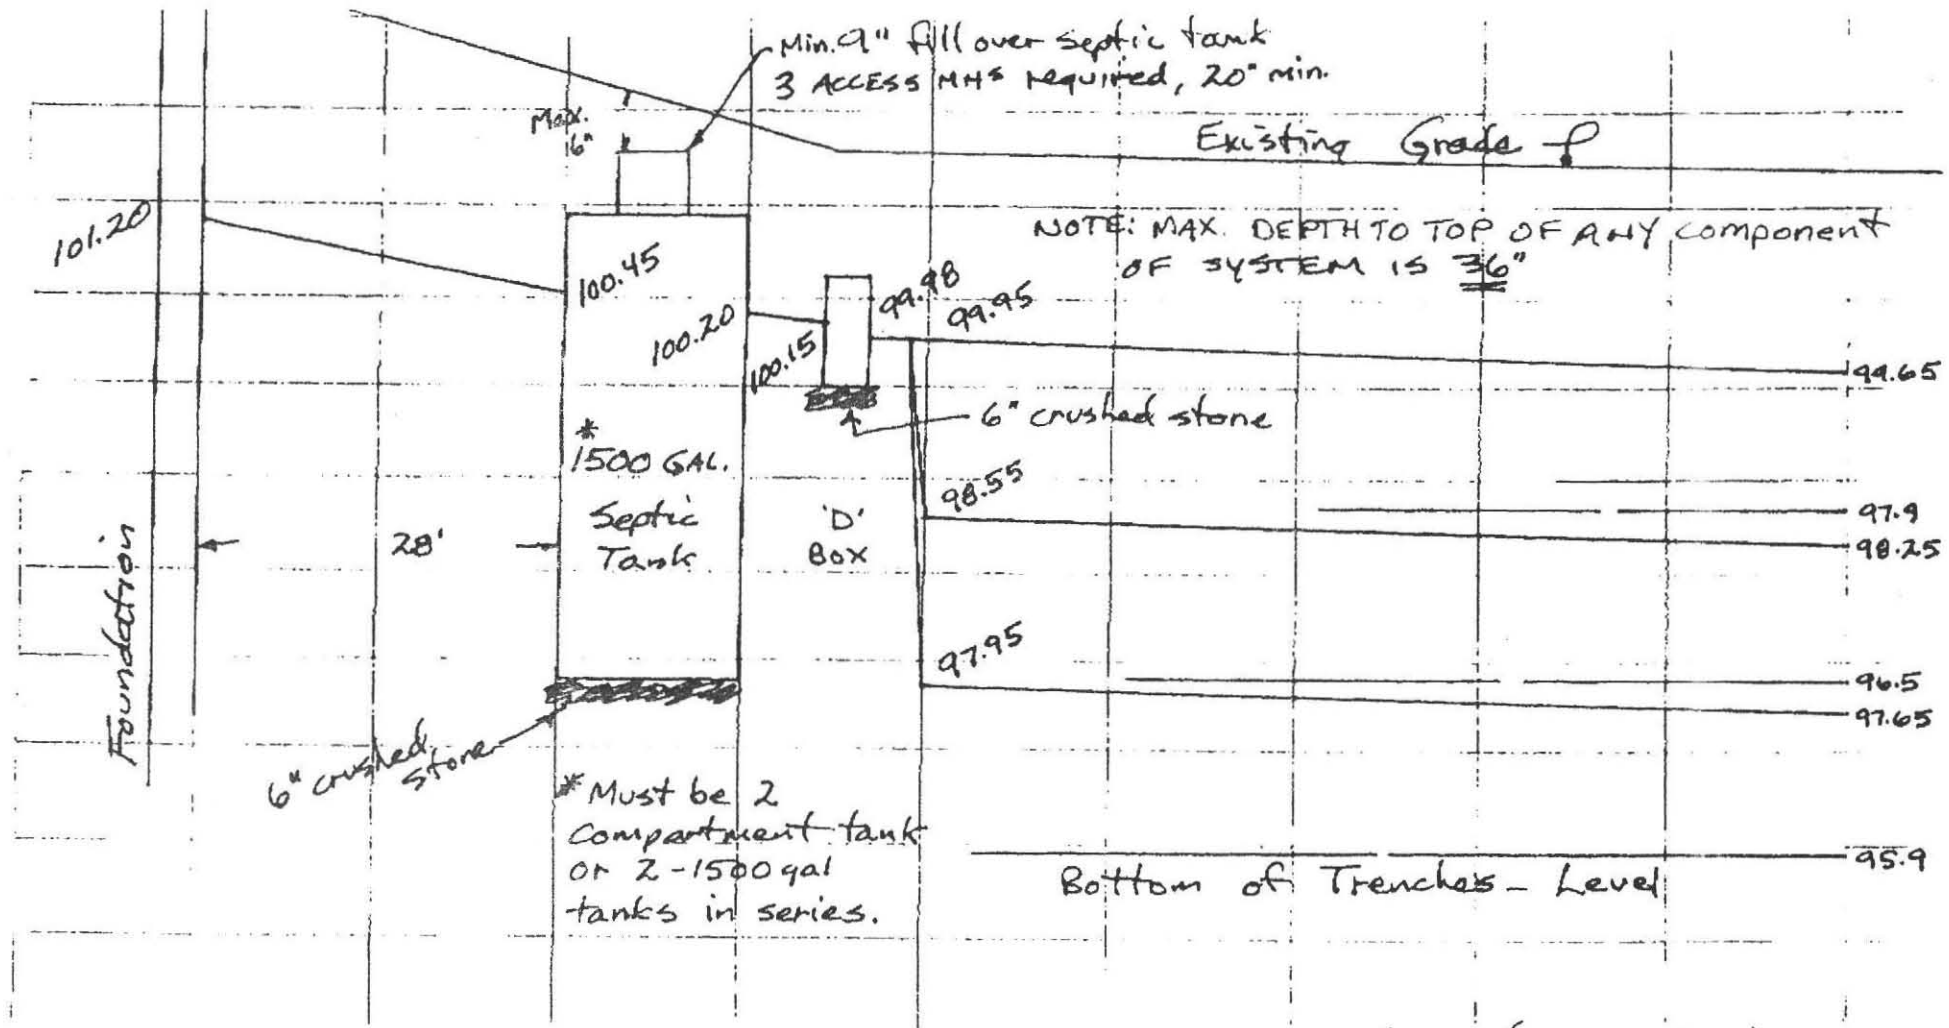



NOTES:

1. SEPTIC TANK SHALL HAVE INLET AND OUTLET TEES (15.227 TITLE V)
2. D-BOX SHALL HAVE 6" SUMP BELOW OUTLET INVERT (15.232(3c) TITLE V)
3. ACCESS MANHOLE TO SEPTIC TANK SHALL BE WITHIN 6" TO FINISHED GRADE
4. SEPTIC TANKS SHOULD BE INSPECTED ANNUALLY
5. ELEVATIONS ARE TO INVERTS UNLESS NOTED (INSIDE BOTTOM OF PIPE)
6. D-BOX OUTLET PIPES SHALL BE LEVEL MIN. 2.0 FT. (SECT 15.232(3c) TITLE V)
7. END CAPS ON PIPES

PROFILE OF SYSTEM

SCALE HORIZ 1" = 10'
VERT. 1" = 2'



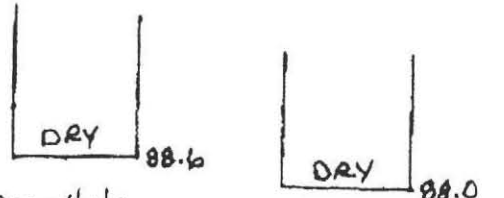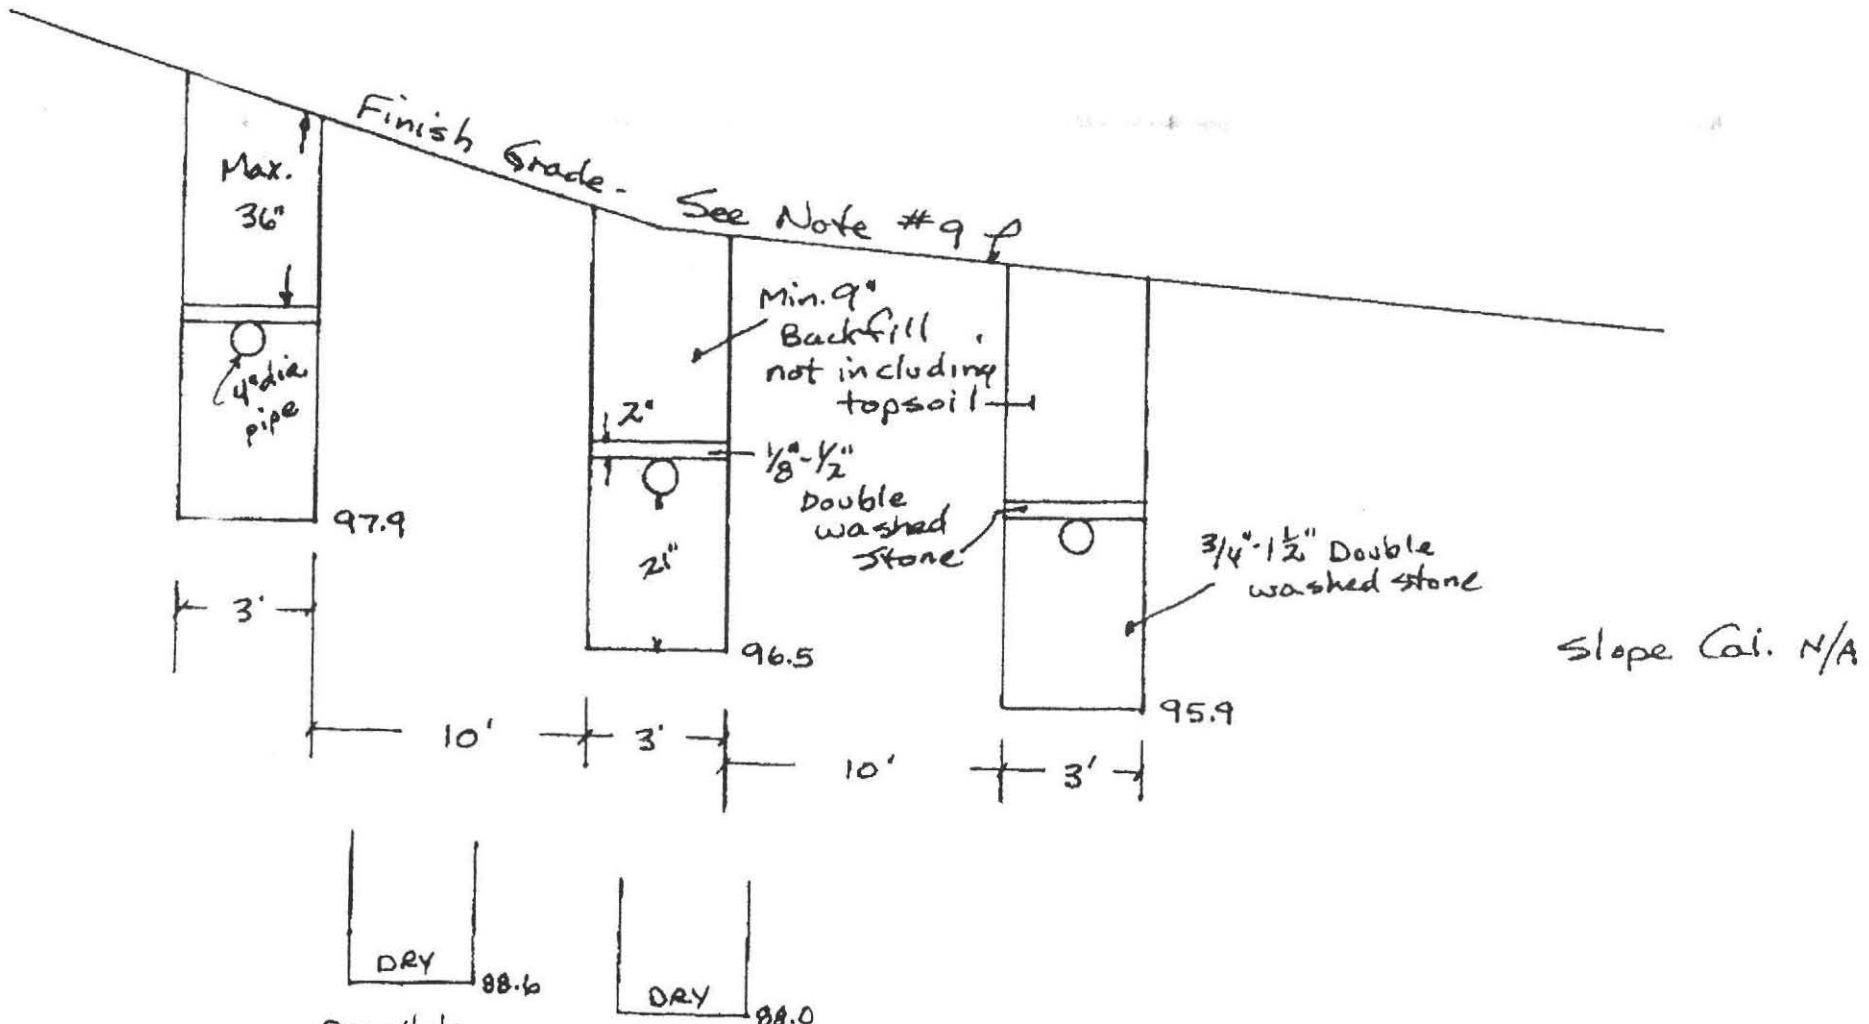

NOTES:

- 8. ALL LOAM, SUBSOIL, AND OTHER IMPERVIOUS MATERIAL SHALL BE REMOVED WITHIN 5 FT. OF LEACHING FACILITY, SECT 15.255(5) TITLE V
- 9. FINISH GRADE ABOVE & ADJACENT TO SYSTEM SHALL SLOPE @ least 2% TO PREVENT ACCUMULATION OF SURFACE WATER.
- 10. FILL SHALL HAVE PERC RATE OF 2.0 min/in. BEFORE AND AFTER PLACEMENT.

CROSSSECTION OF SYSTEM
NO SCALE

